


# TORX FLAT HEAD WOOD SCREWS

ISO UNI DIN

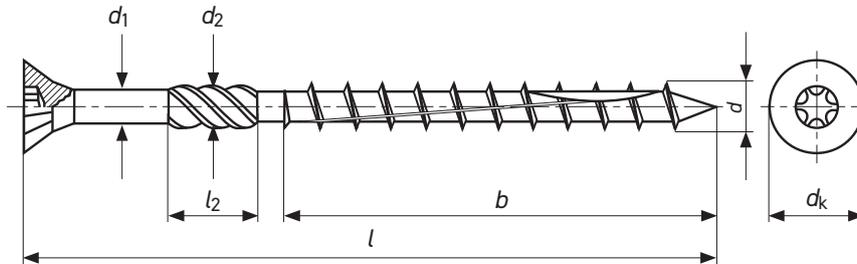

**MATERIAL**

**STEEL HARDENED**

**MECHANICAL PROPERTIES**

ACCORDING TO ISO 2702

**CLASS**

**C15**

**TOLLERANCES**

ACCORDING TO ISO 4759-1 CAT A

**AVAILABLE TREATMENT**

Yellow zinc plated according to RoHS - Other coatings on request

<i>d</i>	4	4,5	5	6	8,0	10,0
<i>d<sub>k</sub> max</i>	8,0	9,0	10,0	12,1	15,0	18,2
<i>d<sub>k</sub> min</i>	7,50	8,50	9,65	11,50	14,3	17,4
<i>d<sub>1</sub></i>	2,80 - 2,9	3,1 - 3,2	3,45 - 3,55	4,2 - 4,3	5,73 - 5,83	6,95 - 7,05
<i>d<sub>2</sub></i>	3,5 - 3,8	3,7 - 4	3,7 - 4,4	4,8 - 5,2	6,8 - 7,2	8 - 8,5
<i>l<sub>2</sub></i>	4,8 - 5	6,7 - 7	7,6 - 8	9,9 - 12,9	9,9 - 12,9	9,9 - 12,9
<i>Torx nr.</i>	T20	T25	T25	T30	T40	T50

	d							d						
	4	4,5	5	6	8	10		4	4,5	5	6	8	10	
<b>l</b>	<b>b</b>							<b>l</b>						
20	-						20	1,5						
30	18	18	18				30	1,7	2	2,85				
35	20	20	20				35	1,9	2,3	3,1				
40	24	24	24				40	2,1	2,6	3,35				
45	27	27	27				45	2,4	2,9	3,73				
50	30	30	30				50	2,6	3,25	4,1				
60	35	35	35	35			60	3,2	3,85	4,85	7,15			
70	42	42	42	42			70	3,6	4,5	5,65	8,55			
80		50	50	50	50	52	80		5,12	6,4	9,55	17,8		
90			50	50	50	52	90			7,15	10,55	19,9	29,9	
100			50	50	50	52	100			7,9	11,9	22,1	32,8	
110			50	50	50	52	110			8,6	13,25	22,6	35,8	
120			70	70	80	80	120			9,3	14,6	23,1	38,7	
130				70	80	80	130				15,95	26,6	41,7	
140				70	80	80	140				17,3	30,1	44,8	
160				70	80	80	160				18,65	34,2	50,9	
180				70	80	80	180				20	38,2	56,9	
200				70	80	80	200				21,35	42,3	63,0	
220				70	80	80	220				22,7	46,3	69,0	
240				70	80	80	240				24,05	50,4	75,1	
260				70	80	80	260				25,4	54,4	81,1	
280				70	80	80	280				26,75	58,5	87,2	
300				70	80	80	300				28,1	62,5	93,2	
320					80	80	320					66,6	99,3	
340					80	80	340					70,6	105,3	
360					80	80	360					74,7	111,4	
380					80	80	380					78,7	117,4	
400					80	80	400					82,8	123,5	

 Kg

d = DIAMETER - l = LENGTH

 Weight for 1000 pcs

The weights indicated are approximate. **Other sizes available on request.**

