


TEMPERED DOWEL PINS WITH INTERNAL THREAD

ISO 8735 UNI 6364B DIN 7979D

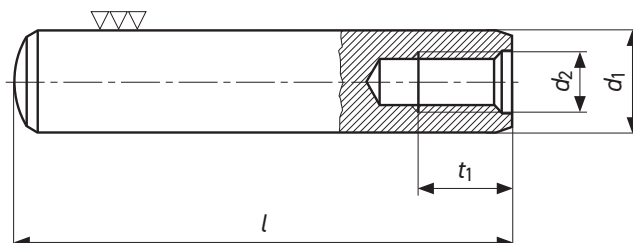

MATERIAL

STEEL ISO 683-17 UNI 3097

MECHANICAL PROPERTIES

550-650 HV

CLASS

100 Cr6

TOLLERANCES

GRINDED m6

AVAILABLE TREATMENT

As machined

d_1	5	6	8	10	12	14	16	20
d_2	M3	M4	M5	M6	M6	M8	M8	M10
t_1	3	6	8	10	12	14	16	18

l									Kg
l = LENGTH	16	2,04	2,79						
	18	2,29	3,3						
	20	2,55	3,67	6,4					
	24	3,05	4,55	7,98	12,2				
	28	3,56	5,43	9,56	14,7				
	30	3,81	5,87	10,35	20,8	21,3			
	32	4,08	6,31	10,3	17,2	23,1	27,6		
	36	4,59	7,19	11,9	19,7	26,7	31		
	40	5,1	8,07	13,5	22,2	30,3	34,5	52	
	45	5,73	9,17	15,5	25,3	35,1	38,8	59,9	92,6
	50		10,3	17,5	28,4	39,9	43,1	67,8	105
	55		11,4	19,5	31,5	44,7	47,4	75,7	117
	60		12,5	21,5	34,6	49,5	53,1	82,8	130
	70			25,5	40,8	59,1	61,9	98,5	155
	80			29,5	47	68,7	70,8	115	180
	90				53,2	78,3	84,4	131	205
	100				59,4	87,9	93,7	147	230
	120						115	180	280

Weight for 1000 pcs

The weights indicated are approximate. **Other sizes available on request.**



THE DATA CONTAINED ARE NOT BINDING. THE COMPANY RESERVES THE RIGHT TO CHANGE THE INFORMATION CONTAINED WITHOUT PRIOR NOTICE. Copyright VIPA s.p.a.