


INTERNAL DRIVE PIPE PLUG WITH CONICAL THREAD HEX SOCKET

ISO UNI DIN
- - 906

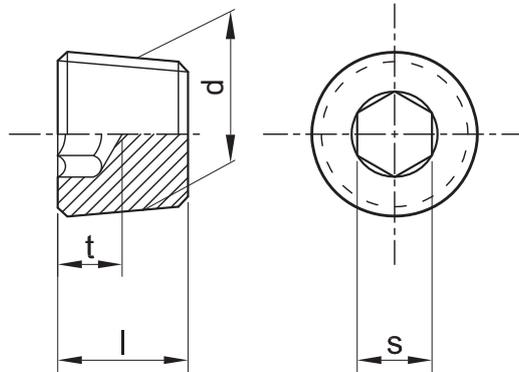

MATERIAL	STEEL	STAINLESS STEEL
MECHANICAL PROPERTIES	According to UNI EN 10277, 10263-3	According to UNI EN ISO 3506-1
CLASS	5.8	A2 A4
TOLLERANCESS	According to UNI 4759-1	According to UNI 4759-1
AVAILABLE TREATMENT	Plain, phosphated, White zinc plated according to RoHS - Other coatings on request	

d	s	t _{min}	l	 Kg
M 6x1	4	4	8	0,85
M 8x1	4	4	8	2,07
M 10x1	5	4	8	3,38
M 12x1,5	6	5	10	6,1
M 14x1,5	7	5	10	8,1
M 16x1,5	8	5	10	11,0
M 18x1,5	8	5	10	14,6
M 20x1,5	10	5	10	17,6
M 22x1,5	10	5	10	22,0
M 24x1,5	12	6	12	30,8
M 26x1,5	12	6	12	38,6
M 27x2	12	6	12	40,2
M 30x1,5	17	6	12	44
M 33x1,5	17	6	12	57,5
M 36x1,5	19	7,5	15	85,2
M 38x1,5	19	7,5	15	94,4
M 42x1,5	22	11,5	18	135
1/8"	5	4	8	3,4
1/4"	7	s	10	7
3/8"	8	5	10	12,2
1/2"	10	5	10	19
3/4"	12	6	12	40,2
1"	17	6	12	57,5
1" 1/4	22	11,5	18	135
1" 1/2	24	11,5	20	214



For stainless steel A2 products, multiply the weight values for 1,01, A4 by 1,013.
The weights indicated are approximate. **Other sizes available on request.**

