


CROSS RECESSED COUNTERSUNK RAISED HEAD SCREWS

ISO METRIC COARSE THREAD

ISO 7047 UNI 7689 DIN 966

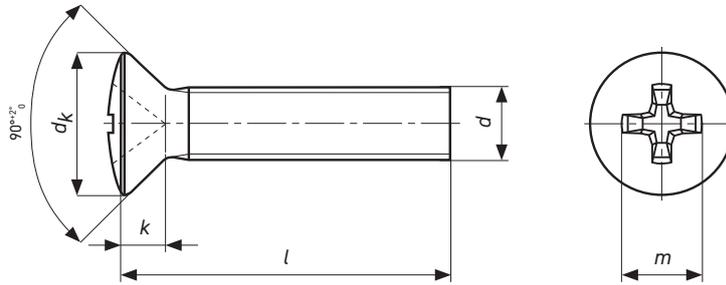

MATERIAL	STEEL	STAINLESS STEEL
MECHANICAL PROPERTIES	ACCORDING TO ISO 898-1	ACCORDING TO ISO 3506-1
CLASS	4.8	A2 A4
TOLLERANCES	ACCORDING TO ISO 4759-1 CAT A	ACCORDING TO ISO 4759-1 CAT A
AVAILABLE TREATMENT	Plain - White zinc plated or Yellow zinc plated according to RoHS. Other coatings on request	

d	M2	M2,5	M3	M4	M5	M6	M8
dk	3,8	4,7	5,6	7,5	9,2	11	14,5
k	1,2	1,5	1,65	2,2	2,5	3	4
m	2,35	2,70	3,10	4	5,30	6,80	8,80
N° Phillips	1	1	1	2	2	3	4

l = LENGTH	Kg						
	M2	M2,5	M3	M4	M5	M6	M8
4	0,14	0,24	0,35				
5	0,16	0,27	0,40	0,99			
6	0,18	0,30	0,44	1,07	1,49		
7				1,15			
8	0,21	0,36	0,53	1,23	1,74	2,79	
10	0,25	0,42	0,62	1,39	1,97	3,14	6,89
12	0,29	0,48	0,70	1,54	2,21	3,49	7,53
14	0,33	0,54	0,79	1,70	2,45	3,84	8,17
16	0,36	0,60	0,88	1,85	2,69	4,19	8,81
18				2,01	2,93		
20	0,44	0,72	1,06	2,17	3,17	4,89	10,10
22		—	1,15	2,30	3,41		
25		0,87	1,28	2,56	3,77	5,77	11,70
30			1,50	2,95	4,37	6,64	13,30
35				3,34	4,97	7,52	14,90
40				3,73	5,57	8,39	16,50
45				4,12	6,16	9,27	18,10
50				4,51	6,76	10,10	19,70
55					7,36	11,00	21,30
60					7,96	11,90	22,90
65					8,56	13,11	
70					9,41	14,01	
80						15,82	
90						17,63	
100						19,43	

Weight for 1000 pcs
 Screws with nominal length under the line (green for steel, blue for stainless steel) can have partial thread.
 For stainless steel A2 products, multiply the weight values for 1,01, A4 by 1,013.
 The weights indicated are approximate. **Other sizes available on request.**

