


HEXALOBULAR PAN HEAD SCREWS

ISO METRIC COARSE THREAD

ISO 14583 UNI - DIN -

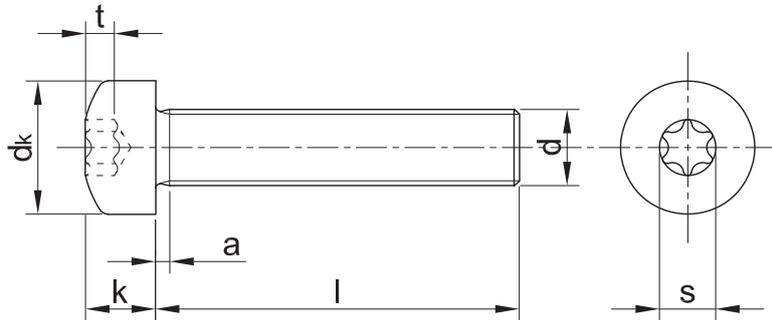

MATERIAL	STEEL				STAINLESS STEEL			
MECHANICAL PROPERTIES	ACCORDING TO ISO 898-1				ACCORDING TO ISO 3506-1			
CLASS	4.8		8.8		A2		A4	
TOLLERANCES	ACCORDING TO ISO 4759-1 CAT A				ACCORDING TO ISO 4759-1 CAT A			
AVAILABLE TREATMENT	Plain - White zinc plated according to RoHS. Other coatings on request							
d	M2	M2,5	M3	M4	M5	M6	M8	M10
dk	4	5	6	8	10	12	16	20
k	1,7	2	2,4	3,1	3,8	4,6	6	7,5
s	1,75	2,4	2,8	3,95	4,5	5,6	7,95	8,95
t max	0,77	1,04	1,27	1,66	1,91	2,42	3,18	4,02
torx n.	6	8	10	20	25	30	45	50

l = LENGTH	Weight for 1000 pcs							
	M2	M2,5	M3	M4	M5	M6	M8	M10
3	0,178	0,336						
4	0,196	0,366	0,544					
5	0,215	0,396	0,588	1,30				
6	0,233	0,426	0,632	1,38	2,32			
8	0,270	0,486	0,720	1,53	2,57	4,37		
10	0,307	0,546	0,808	1,69	2,81	4,72	9,96	
12	0,344	0,606	0,896	1,84	3,06	5,07	10,6	19,8
14	0,381	0,666	0,984	2,00	3,31	5,42	11,2	20,5
16	0,418	0,726	1,07	2,15	3,56	5,78	11,9	21,8
20	0,492	0,846	1,25	2,46	4,05	6,48	13,2	23,8
25		0,996	1,47	2,85	4,67	7,36	14,8	26,3
30			1,69	3,23	5,29	8,24	16,4	28,8
35				3,62	5,91	9,12	18,0	31,3
40				4,01	6,52	10	19,6	33,9
45					7,14	10,90	21,2	36,4
50					7,76	11,8	22,8	38,9
55						12,6	24,4	41,4
60						13,5	26,0	43,9

Weight for 1000 pcs

Screws with nominal length under the line can have partial thread.
For stainless steel A2 products, multiply the weight values for 1,01, A4 by 1,013.
The weights indicated are approximate. **Other sizes available on request.**

