


STEEL CYLINDRICAL HEAD BLIND RIVET NUTS WITH HEXAGONAL SHANK FTTEC

ISO METRIC COARSE THREAD

ISO UNI DIN

- - -

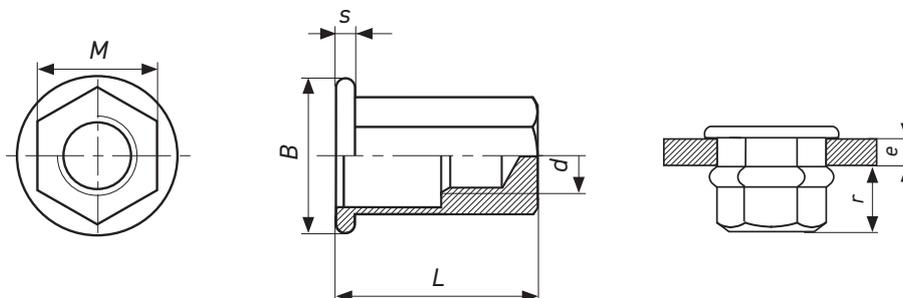

MATERIAL

STEEL CB 4 FF


TOLLERANCES

According to ISO 4159-1 CAT A

AVAILABLE TREATMENT

White zinc plated according to RoHs - Other coatings on request

d		L*	B	M ₁	M	e	s	r*	Torque Nm
M4	C	17,3	9,0	6	5,9	0,5 - 2	0,8	13,0	5
M5	C	19,5	10,0	7	6,9	0,5 - 2,5	1,0	14,5	9
M6	C	24,3	13,0	9	8,9	0,5 - 3	1,5	16,8	15
M8	C	28	15,0	11	10,9	1 - 3,5	1,5	20,5	25

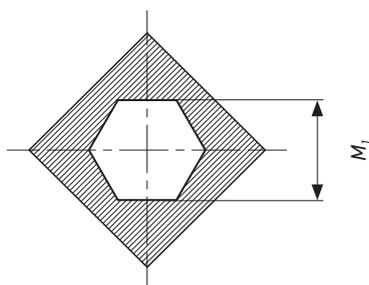

(*) Sizes L and r allow wide tolerances for the reference values are e and M₁

