


STEEL KNURLED COUNTERSUNK HEAD BLIND RIVET NUTS FTSC

ISO METRIC COARSE THREAD

ISO UNI DIN

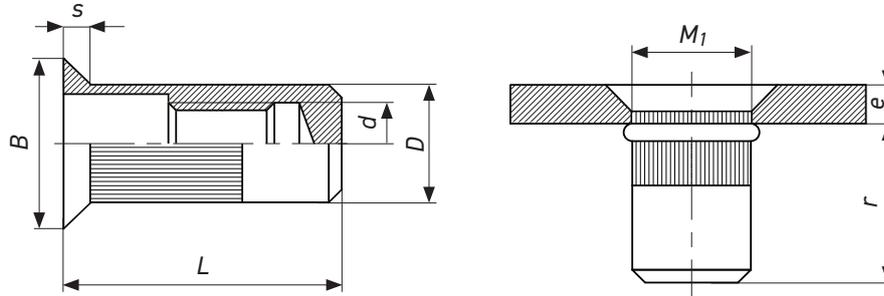

MATERIAL

STEEL CB 4 FF

TOLLERANCES

According to ISO 4159-1 CAT A

AVAILABLE TREATMENT

White zinc plated according to RoHs - Other coatings on request

d	L*	B	M ₁	D	e	s	r*	Torque Nm
M4	17,3	9,0	6	5,9	1,6 - 3,5	1,5	12,3	3
M5	19,5	10,0	7	6,9	1,6 - 4	1,5	14,0	5
M6	23,5	12,0	9	8,9	1,6 - 4,5	1,5	18	8
M8	26,5	14,0	11	10,9	1,6 - 5	1,5	20	20
M10	33	16,0	13	12,9	1,6 - 5	1,5	21,5	25

.(*) Sizes L and r allow wide tolerances for the reference values are e and D.