


TEMPERED DOWEL PINS

ISO 8734A UNI 6364A DIN 6325

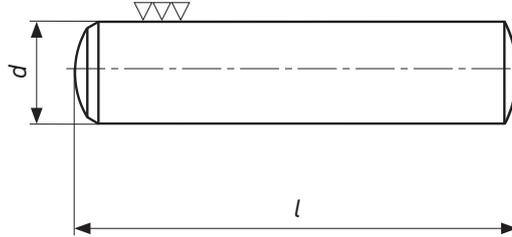

MATERIAL

STEEL ISO 683-17 UNI 3097

MECHANICAL PROPERTIES

550-650 HV

CLASS

100 Cr6

TOLLERANCES

GRINDED m6

AVAILABLE TREATMENT

As machined

d	2	2,5	3	4	5	6	8	10	12	14	16	20
l												
8	0,20	0,30	0,40									
10	0,24	0,38	0,55	0,98								
12	0,30	0,46	0,66	1,20	1,80							
14	0,35	0,54	0,77	1,40	2,00	3,10						
16	0,40	0,60	0,88	1,60	2,50	3,50						
18	0,45	0,68	0,99	1,80	2,80	4,00	7,10					
20	0,50	0,75	1,10	2,00	3,10	4,40	7,90					
22		0,82	1,21	2,20	3,40	4,85	8,70					
24		0,91	1,30	2,40	3,70	5,30	9,50	14,80				
26			1,40	2,60	4,00	5,75	10,30	16,00				
28			1,50	2,80	4,30	6,20	11,00	17,20	24,80			
30			1,60	3,00	4,65	6,65	11,80	18,35	26,60			
32			1,70	3,20	5,00	7,10	12,60	19,70	28,40			
36				3,60	5,50	8,00	14,20	22,20	32,00	43,50		
40					6,20	8,80	15,70	24,60	35,50	48,00	63,00	
45					7,00	10,00	17,70	27,70	40,00	54,00	71,00	
50					7,70	11,00	19,70	30,80	44,40	60,40	79,00	123,00
55						12,00	21,70	33,90	48,80	66,40	87,00	135,00
60						13,00	23,70	36,90	53,20	72,50	95,00	148,00
70							27,60	43,00	62,00	84,50	110,00	172,00
80							31,50	49,30	71,00	96,60	126,00	197,00
90								55,50	80,00	108,70	142,00	222,00
100								61,60	89,00	120,80	158,00	246,00
110										132,90	174,00	270,60
120										145,00	190,00	295,00

Weight for 1000 pcs

The weights indicated are approximate. **Other sizes available on request.**