


HEXAGON WASHER HEAD TAPPING SCREWS

ISO UNI DIN
- 6950 6928

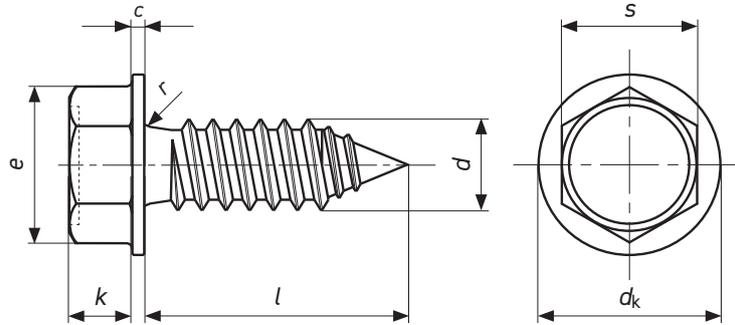

MATERIAL

STEEL HARDENED

MECHANICAL PROPERTIES

ACCORDING TO ISO 2702

CLASS

C15

TOLLERANCES

ACCORDING TO ISO 4759-1 CAT A

AVAILABLE TREATMENT

Plain - White zinc plated or Yellow zinc plated according to RoHS - Other coatings on request

<i>d</i>	2,9	3,5	3,9	4,2	4,8	5,5	6,3
<i>N ISO</i>	4	6	7	8	10	12	14
<i>S h13 max</i>	5	5,5	7	7	8	8	10
<i>dk</i>	6,5	7,21	9,18	9,73	10,61	11,08	13,86
<i>e min</i>	5,45	6	7,66	7,66	8,87	8,87	11,05
<i>k min</i>	1,62	2,42	2,42	2,92	3,12	4,15	4,95
<i>r max</i>	0,4	0,5	0,6	0,6	0,7	0,8	0,9
<i>r min</i>	0,2	0,3	0,4	0,4	0,4	0,5	0,7
<i>c min</i>	0,4	0,6	0,6	0,8	0,9	1	1

	<i>l mm</i>	<i>l inches</i>							Kg
l = LENGTH	4,5	3/16"							
	6,5	1/4"	0,43	0,93					
	9,5	3/8"	0,54	1,10	1,14	1,84	2,48		
	13	1/2"	0,66	1,28	1,35	2,09	2,80	3,64	5,44
	16	5/8"	0,77	1,44	1,54	2,31	3,10	4,01	5,96
	19	3/4"	0,87	1,59	1,73	2,50	3,39	4,40	6,49
	22	7/8"		1,74	1,93	2,74	3,68	4,78	7,01
	25	1"			2,12	2,95	3,97	5,17	7,54
	32	1"1/4					4,66	6,06	8,76
	38	1"1/2						6,82	9,82
	45	1"3/4							11,10
	50	2"							12,00

Weight for 1000 pcs

Available without tip.

The weights indicated are approximate. **Other sizes available on request.**