


COUNTERSUNK HEAD DRILLING SCREWS

ISO UNI DIN
15482 8119 7504 P

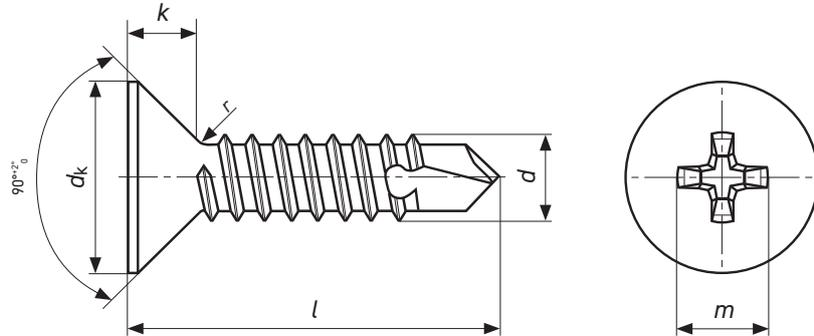

MATERIAL	STEEL HARDENED	STAINLESS STEEL
MECHANICAL PROPERTIES	ACCORDING TO ISO 2702	ACCORDING TO ISO 3506-4
CLASS	C15	A2 A4
TOLLERANCES	ACCORDING TO ISO 4759-1 CAT A	ACCORDING TO ISO 4759-1 CAT A
AVAILABLE TREATMENT	White zinc plated according to RoHS Other coatings on request	

d	2,9	3,5	3,9	4,2	4,8	5,5	6,3
N ISO	4	6	7	8	10	12	14
k max	1,7	2,35	2,45	2,6	2,8	3	3,15
dk max	5,5	7,3	7,9	8,4	9,3	10,3	11,3
dk min	1,2	6,9	7,3	8	8,9	9,9	10,9
m rif	3,2	4,4	4,5	4,6	5,2	6,6	6,8
steel thickness	1,9	2,25	2,6	3	4,4	5,25	6

l = LENGTH	l mm	l inches	thread								Kg
	13	1/2"	13	0,48	0,72	0,9	1,10	1,50			
16	5/8"	16	0,59	0,88	1,1	1,30	1,60	2,50			
19	3/4"	19	0,70	1,10	1,3	1,50	1,80	2,80	3,60		
22	7/8"	22	0,90	1,20	1,46	1,70	2,40	3,30	4,15		
25	1"	25	1,00	1,40	1,65	1,90	2,70	3,70	4,70		
32	1"1/4	32		1,80	1,9	2,50	3,40	4,70	5,95		
38	1"1/2	38		2,00	2,15	3,00	4,00	5,40	7,10		
45	1"3/4	45				3,60	4,70	6,30	8,40		
50	2"	50					5,20	7,00	9,30		
60		60					5,70		10,10		
70		70					6,30		11,80		
80		65±5					6,90		13,60		
90		65±5							15,30		
100		65±5							17,10		

Weight for 1000 pcs

The weights indicated are approximate. Other sizes available on request.

