


HEXAGONAL FLANGED HEAD WOOD SCREWS

ISO UNI DIN

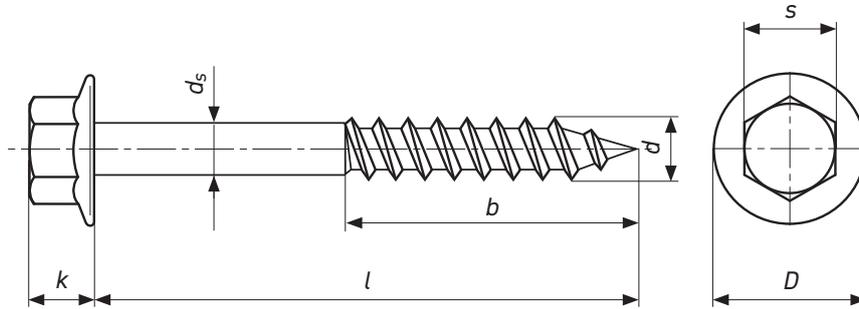

$$b_{min} = 0,6 \times l$$

MATERIAL

STEEL

MECHANICAL PROPERTIES

ACCORDING TO ISO 202 - 1:2001

CLASS

4.8

TOLLERANCES

ACCORDING TO ISO 4759-1 CAT A

AVAILABLE TREATMENT

White zinc plated according to RoHS - Other coatings on request

d	6,5
d_s min	5,1 ÷ 5,2
D	14,2 ÷ 15
k	5,5
s	10

l	b	Kg
40	40	8,70
45	45	9,90
50	50	11,00
60	60	12,50
70	60 ± 1,5	14,00
80	60 ± 1,5	15,50
90	60 ± 1,5	17,00
100	60 ± 1,5	18,50
110	60 ± 1,5	20,00
120	60 ± 1,5	21,50
130	60 ± 1,5	23,00
140	60 ± 1,5	24,50
150	60 ± 1,5	26,00
160	60 ± 1,5	27,50
170	60 ± 1,5	29,00
180	60 ± 1,5	30,50

Weight for 1000 pcs

The weights indicated are approximate. **Other sizes available on request.**