


SERRATED SPRING WASHERS "SCHNORR" TYPE

ISO UNI DIN

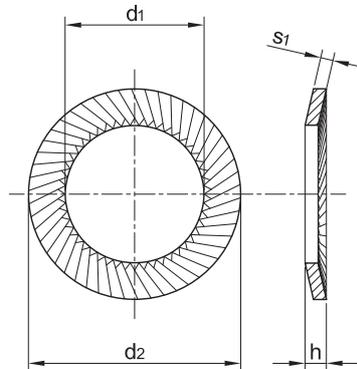

MATERIAL	SPRING STEEL	STAINLESS STEEL
MECHANICAL PROPERTIES	ACCORDING TO UNI EN 10132-4	ACCORDING TO UNI EN 10132-4
CLASS	430-530 HV	A2
TOLLERANCES	ACCORDING TO DIN 2093	ACCORDING TO DIN 137
AVAILABLE TREATMENT	Black - White zinc plated or Yellow zinc plated with dehydrogenation according to RoHS Other coatings on request	

d	d ₁	d ₂	s ₁	h max	 Kg
M 3	3,2	5,5	0,45	0,9	0,049
M 4	4,3	7,0	0,5	1	0,085
M 5	5,3	9,0	0,6	1,1	0,167
M 6	6,4	10,0	0,7	1,2	0,200
M 8	8,4	13,0	0,8	1,4	0,392
M 10	10,5	16,0	1,0	1,6	0,750
M 12	13,0	18,0	1,1	1,7	0,879
M 14	15,0	22,0	1,2	2	1,400
M 16	17,0	24,0	1,3	2,1	2,000
M 18	19,0	27,0	1,5	2,3	2,970
M 20	21,0	30,0	1,5	2,4	3,742
M 22	23,0	33,0	1,5	2,5	4,507
M 24	25,6	36,0	1,8	2,7	5,910
M 27	28,6	39,0	2,0	2,9	-
M 30	31,6	45,0	2,0	3,2	-

 Weight for 1000 pcs

The weights indicated are approximate. **Other sizes available on request.**

