


SLOTTED COUNTERSUNK HEAD TAPPING SCREWS

ISO 1482 UNI 6952 DIN 7972

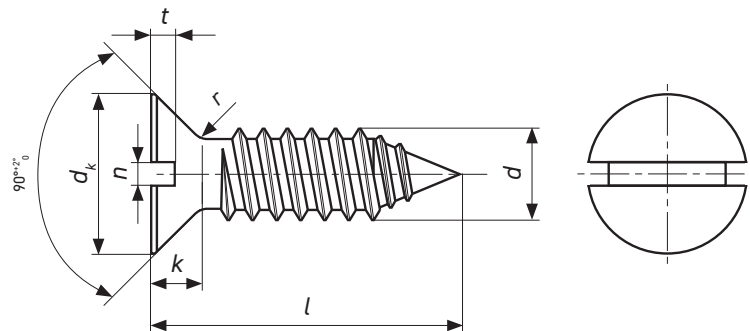

MATERIAL

STEEL HARDENED

STAINLESS STEEL

MECHANICAL PROPERTIES

ACCORDING TO ISO 2702

ACCORDING TO ISO 3506-4

CLASS

C15

A2

TOLLERANCES

ACCORDING TO ISO 4759-1 CAT A

ACCORDING TO ISO 4759-1 CAT A

AVAILABLE TREATMENT

Plain - White zinc plated or Yellow zinc plated according to RoHS

Other coatings on request

d	2,2	2,9	3,5	3,9	4,2	4,8	5,5	6,3
N ISO	2	4	6	7	8	10	12	14
dk	4,3	5,5	6,8	7,5	8,1	9,5	10,8	12,4
K	1,3	1,7	2,1	2,3	2,5	3	3,4	3,8
n	0,6	0,8	1	1	1,2	1,2	1,6	1,6
r max	0,8	1,1	1,4	1,5	1,6	1,9	2,1	2,4
t min	0,4	0,5	0,6	0,7	0,75	0,85	1	1,2
t max	0,6	0,75	0,95	1,05	1,15	1,35	1,5	1,75

<i>l</i> mm		<i>l</i> inches								 Kg
<i>l</i> = LENGTH	4,5	3/16	0,10							
	6,5	1/4	0,14	0,24						
	9,5	3/8	0,20	0,35	0,54	0,66	0,78	1,10		
	13	1/2	0,27	0,48	0,72	0,88	1,02	1,45	2,11	2,53
	16	5/8	0,34	0,58	0,87	1,07	1,23	1,75	2,49	3,07
	19	3/4		0,69	1,02	1,26	1,44	2,05	2,87	3,61
	22	7/8		0,80	1,17	1,45	1,65	2,35	3,26	4,15
	25	1"		0,91	1,32	1,64	1,86	2,65	3,65	4,69
	32	1"1/4			1,67	2,08	2,35	3,35	4,56	5,95
	38	1"1/2			1,97	2,46	2,77	3,95	5,34	7,03
	45	1"3/4					3,26	4,65	6,25	8,29
	50	2"							6,90	9,19

Weight for 1000 pcs

The weights indicated are approximate. Other sizes available on request.

