


SLOTTED COUNTERSUNK RAISED HEAD TAPPING SCREWS

ISO 1483 UNI 6953 DIN 7973

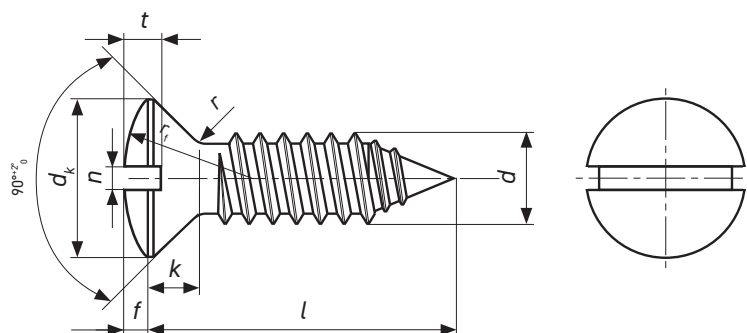

MATERIAL	STEEL HARDENED	STAINLESS STEEL
MECHANICAL PROPERTIES	ACCORDING TO ISO 2702	ACCORDING TO ISO 3506-4
CLASS	C15	A2
TOLLERANCES	ACCORDING TO ISO 4759-1 CAT A	ACCORDING TO ISO 4759-1 CAT A
AVAILABLE TREATMENT	Plain - White zinc plated or Yellow zinc plated according to RoHS Other coatings on request	

d	2,2	2,9	3,5	3,9	4,2	4,8	5,5	6,3
N ISO	2	4	6	7	8	10	12	14
dk	4,3	5,5	6,8	7,5	8,1	9,5	10,8	12,4
f	0,7	0,9	1,2	1,3	1,4	1,5	1,7	2
K	1,3	1,7	2,1	2,3	2,5	3	3,4	3,8
n	0,6	0,8	1	1	1,2	1,2	1,6	1,6
rf	3,8	4,6	5,4	6	6,6	8,2	9,4	11,1
t min	0,95	1,25	1,55	1,7	1,85	2,15	2,45	2,85
t max	1,15	1,5	1,9	2,05	2,25	2,6	2,95	3,45

	l mm	l inches							
l = LENGTH	4,5	3/16	0,14						
	6,5	1/4	0,18	0,33					
	9,5	3/8	0,24	0,44	0,72	0,89	1,07	1,88	
	13	1/2	0,31	0,57	0,90	1,11	1,32	2,18	3,12
	16	5/8	0,37	0,67	1,05	1,30	1,53	2,48	3,50
	19	3/4		0,78	1,20	1,49	1,74	2,78	3,89
	22	7/8			0,35	1,68	1,95	3,08	4,28
	25	1"			1,50	1,87	2,16	3,78	5,19
	32	1 1/2"					2,65	4,38	5,97
	38	1 3/4"						5,08	6,88
	45	2"							9,24

Kg

Weight for 1000 pcs

The weights indicated are approximate. Other sizes available on request.



THE DATA CONTAINED ARE NOT BINDING. THE COMPANY RESERVES THE RIGHT TO CHANGE THE INFORMATION CONTAINED WITHOUT PRIOR NOTICE. Copyright VIPA s.p.a.