


HEXAGON HEAD TAPPING SCREWS

ISO UNI DIN
1479 6949 7976

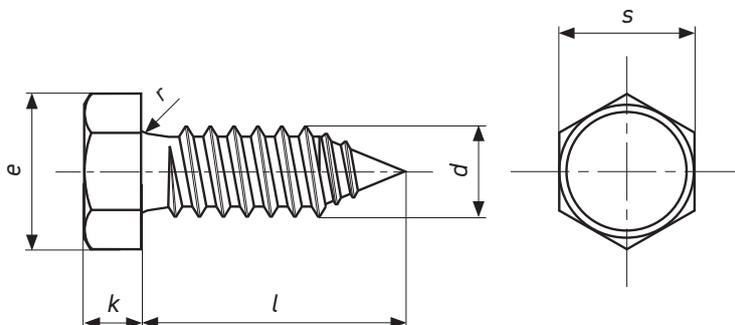

MATERIAL	STEEL HARDENED	STAINLESS STEEL
MECHANICAL PROPERTIES	ACCORDING TO ISO 2702	ACCORDING TO ISO 3506-4
CLASS	C15	A2
TOLLERANCES	ACCORDING TO ISO 4759-1 CAT A	ACCORDING TO ISO 4759-1 CAT A
AVAILABLE TREATMENT	White zinc plated or Yellow zinc plated according to RoHS Other coatings on request	

<i>d</i>	3,5	4,2	4,8	5,5	6,3	8
<i>N ISO</i>	6	8	10	12	14	
<i>s max</i>	5,5	7	8	8	10	13
<i>s min</i>	5,32	6,78	7,78	7,78	9,78	12,73
<i>e min</i>	5,96	7,59	8,71	8,71	10,95	14,26
<i>k min</i>	2,3	2,6	3,3	3,6	4,1	5,2
<i>r max</i>	0,1	0,2	0,25	0,25	0,4	

<i>l = LENGTH</i>	<i>l mm</i>						Kg
	6,5	0,60					
9,5	0,74		1,29		1,70		
13	0,92		1,54		2,02		2,72
16	1,08		1,76		2,32		3,09
19	1,23		1,97		2,61		3,48
22			2,19		2,90		3,86
25			2,40		3,19		4,25
32			2,91		3,88		5,14
38					4,46		5,9
45					5,16		6,81
50					5,66		7,46
							10,8
							18,7

Weight for 1000 pcs

The weights indicated are approximate. **Other sizes available on request.**

