


POZI OVAL FLAT HEAD CHIPBOARD SCREWS

ISO UNI DIN
- - 7505 C

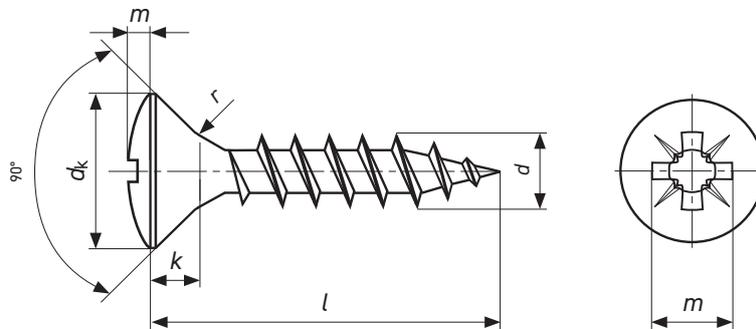

MATERIAL	STEEL HARDENED	STAINLESS STEEL
MECHANICAL PROPERTIES	ACCORDING TO ISO 2702	ACCORDING TO ISO 3506-4
CLASS	C15	A2 A4
TOLLERANCES	ACCORDING TO ISO 4759-1 CAT A	ACCORDING TO ISO 4759-1 CAT A
AVAILABLE TREATMENT	White zinc plated or Yellow zinc plated according to RoHS - Other coatings on request	

	2,50	3,00	3,50	4,00	4,50	5,00	6,00
d_k max	5,00	6,00	7,00	8,00	9,00	10,00	12,00
d_k min	4,70	5,70	6,64	7,64	8,64	9,64	11,57
k max	1,40	1,80	2,00	2,35	2,55	2,85	3,35
$r \approx$	1,50	1,50	1,80	2,00	2,20	2,50	2,50
N° Pozi Recess	1	1	2	2	2	2	3
$m \approx$	3,05	3,00	4,00	4,40	4,80	5,30	6,60
deep	max	1,68	2,01	2,06	2,51	2,92	3,45
	min	1,38	1,76	1,60	2,05	2,46	2,99

l = LENGTH	Kg						
	2,50	3,00	3,50	4,00	4,50	5,00	6,00
12	0,32	0,52	0,73				
16	0,40	0,64	0,90	1,20			
18	0,44	0,70	0,99	1,31			
20	0,48	0,76	1,07	1,42	1,80	2,53	3,44
25	0,59	0,92	1,29	1,69	2,12	2,72	4,01
30		1,07	1,50	1,97	2,44	3,12	4,57
35		1,22	1,71	2,24	2,76	3,59	5,13
40		1,37	1,92	2,51	3,08	3,91	5,70
45			2,14	2,79	3,40	4,30	6,26
50			2,35	3,06	3,72	4,69	6,82
60				3,60	4,36	5,48	7,95
70*					5,00	6,27	9,08
80*						7,06	10,20

Weight for 1000 pcs

(*) Threaded shaft max 63 mm.

For stainless steel A2 products, multiply the weight values for 1,01, A4 by 1,013.

The weights indicated are approximate. **Other sizes available on request.**

THE DATA CONTAINED ARE NOT BINDING. THE COMPANY RESERVES THE RIGHT TO CHANGE THE INFORMATION CONTAINED WITHOUT PRIOR NOTICE. Copyright VIPA s.p.a.

