


POZI PAN HEAD CHIPBOARD SCREWS

ISO UNI DIN
- - 7505 B

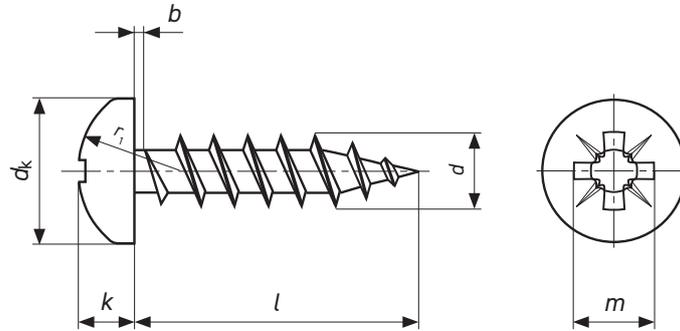

| MATERIAL | STEEL HARDENED | STAINLESS STEEL |
|-----------------------|--|-------------------------------|
| MECHANICAL PROPERTIES | ACCORDING TO ISO 2702 | ACCORDING TO ISO 3506-4 |
| CLASS | C15 | A2 A4 |
| TOLLERANCES | ACCORDING TO ISO 4759-1 CAT A | ACCORDING TO ISO 4759-1 CAT A |
| AVAILABLE TREATMENT | White zinc plated or Yellow zinc plated according to RoHS - Other coatings on request | |

| <i>d</i> | 2,50 | 3,00 | 3,50 | 4,00 | 4,50 | 5,00 | 6,00 |
|--|------|------|------|------|------|------|-------|
| <i>dk</i> max | 4,90 | 5,90 | 6,90 | 7,90 | 8,80 | 9,80 | 11,75 |
| <i>dk</i> min | 4,60 | 5,60 | 6,54 | 7,54 | 8,44 | 9,44 | 11,32 |
| <i>k</i> min | 2,00 | 2,25 | 2,60 | 2,80 | 3,00 | 3,50 | 4,10 |
| <i>k</i> max | 1,75 | 2 | 2,35 | 2,55 | 2,75 | 3,2 | 3,8 |
| <i>r</i> ₁ ≈ | 4,98 | 6,02 | 6,73 | 8,05 | 9,09 | 9,98 | 10,84 |
| <i>b</i> max | 0,70 | 0,80 | 0,90 | 1,05 | 1,30 | 1,45 | 1,75 |
|  N° Pozi Recess | 1 | 1 | 2 | 2 | 2 | 2 | 3 |
| <i>m</i> ≈ | 2,60 | 3,00 | 4,10 | 4,30 | 5,00 | 5,00 | 6,60 |
| deep | max | 1,52 | 1,93 | 2,11 | 2,36 | 3,10 | 3,38 |
| | min | 1,27 | 1,68 | 1,65 | 1,90 | 2,64 | 3,02 |

| <i>l</i> | Kg | | | | | | |
|----------|------|------|------|------|------|------|-------|
| | 10 | 0,38 | 0,58 | 0,81 | 1,12 | | |
| 12 | 0,42 | 0,64 | 0,90 | 1,23 | | | |
| 16 | 0,50 | 0,76 | 1,07 | 1,44 | 1,77 | | |
| 18 | 0,54 | 0,83 | 1,15 | 1,55 | 1,90 | | |
| 20 | 0,58 | 0,89 | 1,24 | 1,66 | 2,03 | 2,78 | 4,12 |
| 25 | 0,69 | 1,04 | 1,45 | 1,94 | 2,35 | 3,18 | 4,69 |
| 30 | | 1,19 | 1,66 | 2,21 | 2,67 | 3,57 | 5,24 |
| 35 | | 1,34 | 1,87 | 2,48 | 2,99 | 3,96 | 5,81 |
| 40 | | 1,50 | 2,09 | 2,76 | 3,31 | 4,36 | 6,39 |
| 45 | | 1,66 | 2,30 | 3,03 | 3,63 | 4,75 | 6,93 |
| 50 | | | 2,51 | 3,30 | 3,95 | 5,15 | 7,50 |
| 55 | | | | 3,57 | 4,27 | 5,55 | 8,07 |
| 60 | | | | 3,85 | 4,59 | 5,93 | 8,62 |
| 70* | | | | 4,40 | 5,23 | 6,76 | 9,75 |
| 80* | | | | | | 7,59 | 10,88 |
| 90* | | | | | | 8,42 | 12,00 |

 Weight for 1000 pcs

(*) Threaded shaft max 63 mm.

For stainless steel A2 products, multiply the weight values for 1,01, A4 by 1,013.

The weights indicated are approximate. **Other sizes available on request.**

THE DATA CONTAINED ARE NOT BINDING. THE COMPANY RESERVES THE RIGHT TO CHANGE THE INFORMATION CONTAINED WITHOUT PRIOR NOTICE. Copyright VIPA s.p.a.

