


# POZI FLAT HEAD CHIPBOARD SCREWS

ISO UNI DIN  
- - 7505 A

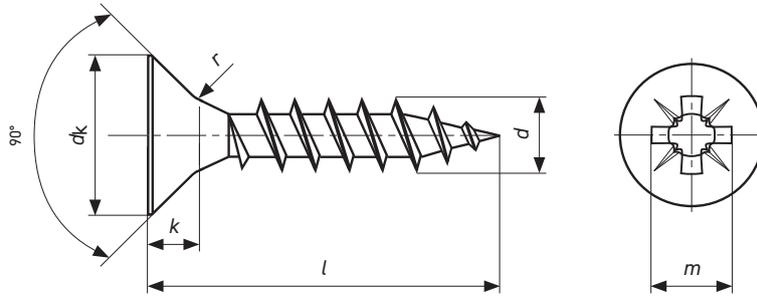

## MATERIAL

STEEL HARDENED

STAINLESS STEEL

## MECHANICAL PROPERTIES

ACCORDING TO ISO 2702

ACCORDING TO ISO 3506-4

## CLASS

**C15**

**A2**

**A4**

## TOLLERANCES

ACCORDING TO ISO 4759-1 CAT A

ACCORDING TO ISO 4759-1 CAT A

## AVAILABLE TREATMENT

White zinc plated or Yellow zinc plated according to RoHS  
- Other coatings on request

<i>d</i>	2,5	3	3,5	4	4,5	5	6
<i>d<sub>k</sub> max</i>	5,00	6,00	7,00	8,00	9,00	10,00	12,00
<i>d<sub>k</sub> min</i>	4,70	5,70	6,64	7,64	8,64	9,64	11,57
<i>k max</i>	1,40	1,80	2,00	2,35	2,55	2,85	3,35
<i>r ≈</i>	1,50	1,50	1,80	2,00	2,20	2,50	2,50
 <i>N° Pozi Recess</i>	1	1	2	2	2	2	3
<i>Øēēp</i>	3,00	3,00	4,00	4,40	4,80	5,30	6,60
max		2,01	2,06	2,51	2,92	3,45	3,45
min	1,38	1,76	1,60	2,05	2,46	2,99	2,99

d	2,5	3	3,5	4	4,5	5	6
10	0,24	0,38	0,52				
12	0,28	0,44	0,60	0,81			
16	0,37	0,57	0,77	1,03	1,30		
18	0,41	0,63	0,86	1,14	1,43		
20	0,45	0,69	0,94	1,25	1,55	1,95	2,85
25	0,55	0,84	1,15	1,52	1,87	2,35	3,41
30		0,99	1,36	1,79	2,19	2,74	3,98
35		1,14	1,58	2,07	2,52	3,13	4,54
40		1,30	1,79	2,34	2,84	3,53	5,10
45		1,46	2,00	2,61	3,16	3,92	5,67
50			2,22	2,89	3,48	4,32	6,23
55				3,17	3,80	4,71	6,79
60				3,43	4,12	5,10	7,36
70*				3,97	4,76	5,89	8,48
80*					5,40	6,68	9,61
90*						7,47	10,74
100*						8,25	11,86
110*						8,60	12,99
120*						9,30	14,12
130*							15,25
140*							16,37
150*							17,50
160*							18,63
180*							20,50
200*							23,26
220*							26,12
240*							28,35

l = LENGTH

 **Weight for 1000 pcs**

(\*) Threaded shaft max 63 mm.

Per i pesi dei prodotti in acciaio inossidabile A2 moltiplicare i valori per 1,01, A4 per 1,013.

 The weights indicated are approximate. **Other sizes available on request.**