


COUNTERSUNK BOLTS 120° WITH SQUARE NECK SCREWS

ISO METRIC COARSE THREAD

ISO UNI DIN
- - 605

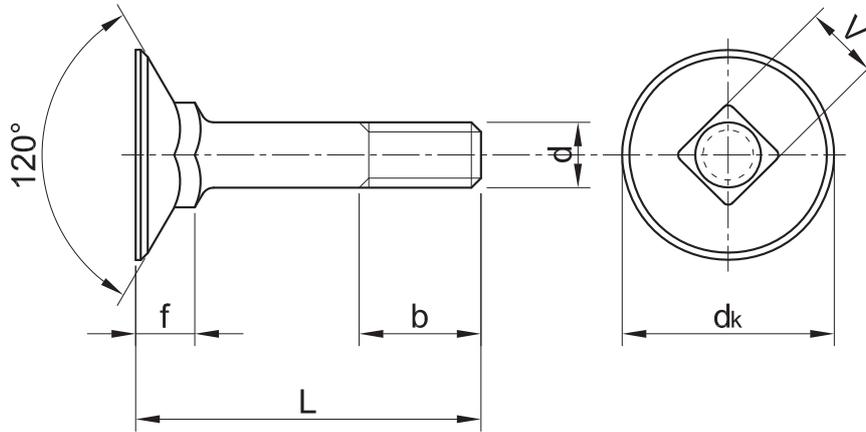

MATERIAL

STEEL

MECHANICAL PROPERTIES

ACCORDING TO ISO 898-1

CLASS

8.8

TOLLERANCES

ACCORDING TO ISO 4759-1 CAT C

AVAILABLE TREATMENT

Plain , White zinc plated according to RoHS. Other coatings on request

<i>d</i>	M5	M6	M8	M10	M12	M14*	M16
<i>dk</i> max	13,55	16,55	20,65	24,65	28,65		38,8
<i>f</i> max	6,3	7,45	9,45	11,55	14,55		17,7
<i>v</i> max	5,48	6,48	8,58	10,58	12,7		16,7
<i>b</i> max <i>l</i> ≤ 120	20	23	28,25	33,5	38,78		48
<i>b</i> max <i>l</i> > 120	-	-	34,25	39,5	44,75		54

<i>l</i>	M5	M6	M8	M10	M12	M14*	M16	Kg
25	30,2							
30	32,7				49,2			
35	35,2				52,8			
40	38,2				56,5	81,1	111	
45	41,2				60,6	86	117	
50	44,3				65	91,4	124	
60	50,5				73,9	103	140	

*measure not provided for by standard

Sizes above the green line have full thread.

The weights indicated are approximate. **Other sizes available on request.**

