


# STEEL REDUCED HEAD RIVET NUTS FTR

ISO METRIC COARSE THREAD

ISO UNI DIN

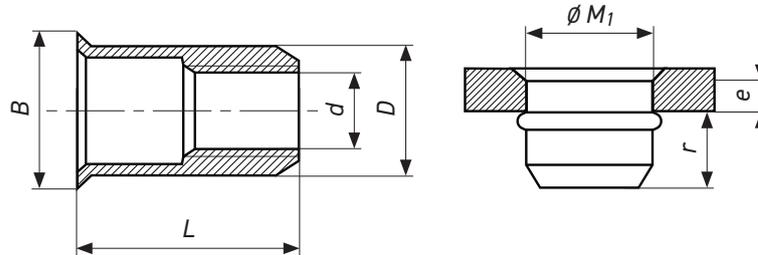

**MATERIAL**

**STEEL CB 4 FF**


**TOLLERANCES**

According to ISO 4159-1 CAT A


**AVAILABLE TREATMENT**

White zinc plated according to RoHs - Other coatings on request

d		L*	B	ø M <sub>1</sub>	D	e	s	r*	Torque Nm
M3	C	8,5	5,6	5	4,9	0.3 - 1.5	0,8	5,5	1
	L	10	5,6	5	4,9	1.5 - 2.5	0,8	5,5	1
M4	C	10,5	7,0	6	5,9	0.5 - 1.5	1,0	6,0	4
	L	13	7,0	6	5,9	2.5 - 4.0	1,0	6,0	4
M5	C	11,5	8,0	7	6,9	0.5 - 3.0	1,2	6,3	8
	L	13	8,0	7	6,9	2.0 - 4.5	1,2	6,8	8
M6	C	13	10,0	9	8,9	0.5 - 3	1,5	8,6	14
	L	15	10,0	9	8,9	3.0 - 6.0	1,5	8,6	14
M8	C	16,5	11,0	11	10,9	0.8 - 3.5	1,5	10,0	25
	L	19,5	11,0	11	10,9	3.5 - 6.0	1,5	10,0	25
M10	C	19	13,5	12	11,9	1.0 - 3.5	1,8	11,2	45
	L	23	13,5	12	11,9	3.6 - 6.0	1,8	11,2	45



TTG Knurled  
(steel only)



TT Smooth

.(\*) Sizes L and r allow wide tolerances for the reference values are e and D.