


TWO WAYS FULL METAL LOCKING NUTS "TRIBLOCK"

ISO METRIC COARSE THREAD

ISO UNI DIN

- - -

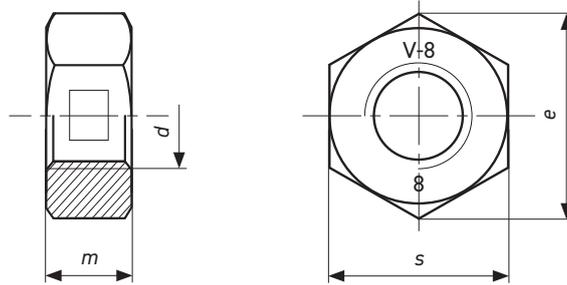

MATERIAL

STEEL

MECHANICAL PROPERTIES

ACCORDING TO **DIN 267-4 UNI 3740-4**

CLASS

8/6S

TOLLERANCES

ACCORDING TO **ISO 4759-1 CAT A - B***

AVAILABLE TREATMENT

Plain - White zinc plated or Yellow zinc plated according to RoHS - Other coatings on request

<i>d</i>	<i>s</i>	<i>m</i>	<i>e</i> min	thread	 Kg
M 5	8	4	8,79	0,8	1,23
M 6	10	5	11,05	1	2,50
M 7	11	5,5	12,12	1	3,12
M 8	13	6,5	14,38	1,25	5,2
M 10	17	8	18,90	1,5	11,6
M 12	19	10	21,10	1,75	17,3
M 14	22	11	24,49	2	25,0
M 16	22	13	26,75	2	33,3

 Weight for 1000 pcs

(**) Tolerances are grade A until diameter M16 grade B over M16.
The weights indicated are approximate. **Other sizes available on request.**

