


# CONICAL SERRATED SPRING WASHERS

ISO UNI DIN  
- 8842 V 6798 V

SHAPE V

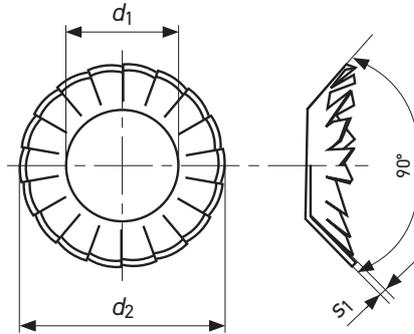

MATERIAL	SPRING STEEL	STAINLESS STEEL
MECHANICAL PROPERTIES	ACCORDING TO UNI EN 10132-4	ACCORDING TO UNI EN 10132-4
CLASS	<b>350-425 HV</b>	<b>A2</b>
TOLLERANCES	ACCORDING TO DIN 6798	ACCORDING TO DIN 6798
AVAILABLE TREATMENT	Black - White zinc plated or Yellow zinc plated with dehydrogenation according to RoHS Other coatings on request	

d	d <sub>1</sub> H13	d <sub>2</sub> H13	s <sub>1</sub>	 Kg
M 3	3,2	6,0	0,2	0,040
M 3,5	3,7	7,0	0,25	0,075
M 4	4,3	8,0	0,25	0,1
M 5	5,3	9,8	0,3	0,2
M 6	6,4	11,8	0,4	0,3
M 8	8,4	15,3	0,4	0,5
M 10	10,5	19,0	0,5	1
M 12	12,5	23,0	0,5	1,5
M 14	14,5	26,2	0,5	2
M 16	16,5	30,2	0,6	2,4

 Weight for 1000 pcs

For stainless steel A2 products, multiply the weight values for 1,01  
The weights indicated are approximate. **Other sizes available on request.**