


# CYLINDRICAL HEAD RIVET NUTS FTT

ISO METRIC COARSE THREAD

ISO UNI DIN

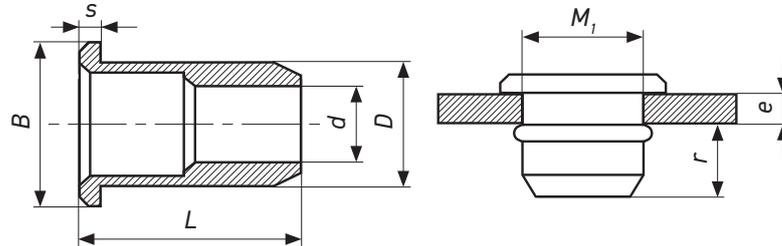

**MATERIAL**

**STEEL CB 4 FF**

**ALUMINIUM Al Mg 5**

**TOLLERANCES**



According to ISO 4159-1 CAT A

According to ISO 4159-1 CAT A

**AVAILABLE TREATMENT**

White zinc plated according to RoHS  
Other coatings on request

d	L*	B	M <sub>1</sub>	D	e	s	r*	Steel	Aluminium	
								Torque Nm	Torque Nm	
M3	C	9	7,2	5	4,9	0.3 - 1.8	0,8	5,5	1	0,7
	L	10,5	7,2	5	4,9	1.8 - 3.0	0,8	5,5	1	0,7
M4	C	11	8,5	6	5,9	0.3 - 2.5	1,0	6,0	5	2,5
	L	13	8,5	6	5,9	2.5 - 4.0	1,0	6,0	5	2,5
M5	C	13	10,0	7	6,9	0.5 - 3.0	1,2	8,0	9	5
	L	15,5	10,0	7	6,9	3.0 - 5.0	1,2	8,0	9	5
M6	C	14,5	12,3	9	8,9	0.5 - 2.3	1,5	9	14	8
	M	16	12,3	9	8,9	2.3 - 4.0	1,5	9	14	8
M8	L	17,5	12,3	9	8,9	4.0 - 6.0	1,5	9	14	8
	C	17,5	15,0	11	10,9	0.8 - 3.5	1,5	10	25	20
M10	L	20	15,0	11	10,9	3.5 - 6.0	1,5	10	25	20
	C	19	15,0	12	11,9	1.0 - 3.5	1,8	10,5	45	25
	L	22	16,0	12	11,9	3.6 - 6.0	1,8	10,5	45	25

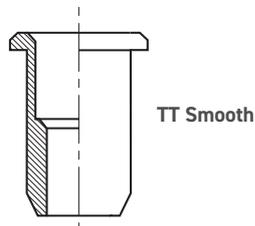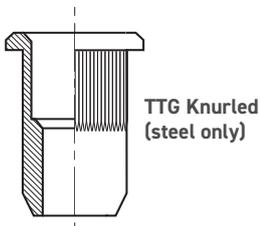

.(\*) Sizes L and r allow wide tolerances for the reference values are e and D.