


# STEEL CYLINDRICAL HEAD RIVET NUTS WITH HEXAGONAL SHANK FTTE

ISO METRIC COARSE THREAD

ISO UNI DIN

- - -

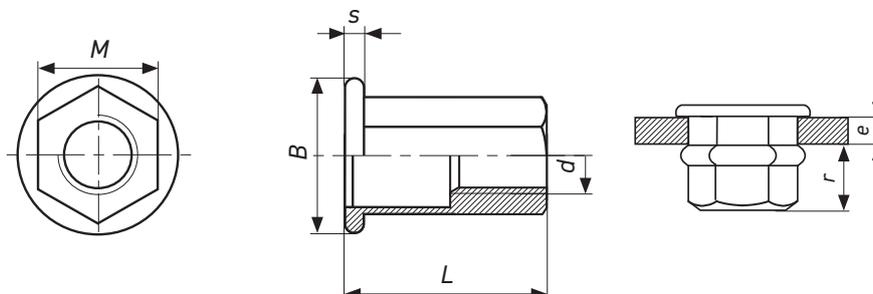

## MATERIAL

STEEL CB 4 FF


## TOLLERANCES

According to ISO 4159-1 CAT A

## AVAILABLE TREATMENT

White zinc plated according to RoHs - Other coatings on request

d		L*	B	M <sub>1</sub>	M	e	s	r*	Torque Nm
M4	C	11	9,0	6	5,9	0,5 - 2	0,8	6,0	5
	L	13,5	9,0	6	5,9	2 - 4	0,8	6,0	5
M5	C	13	10,0	7	6,9	0,5 - 2,5	1,0	8,0	9
	L	16,5	10,0	7	6,9	2,5 - 5	1,0	8,0	9
M6	C	16	13,0	9	8,9	0,5 - 3	1,2	9	14
	L	19,5	13,0	9	8,9	3 - 6	1,5	9	14
M8	C	18	15,0	11	10,9	1 - 3,5	1,5	10	25
	L	21,5	15,0	11	10,9	3 - 6	1,5	10	25
M10	C	20	17,0	12	11,9	0,5 - 3,5	1,8	10,5	45
	L	24	17,0	12	11,9	3 - 6	1,8	10,5	45



.(\*) Sizes L and r allow wide tolerances for the reference values are e and M<sub>1</sub>.