


STEEL REDUCED HEAD RIVET NUTS WITH HEXAGONAL SHANK ER

ISO METRIC COARSE THREAD

ISO UNI DIN

- - -

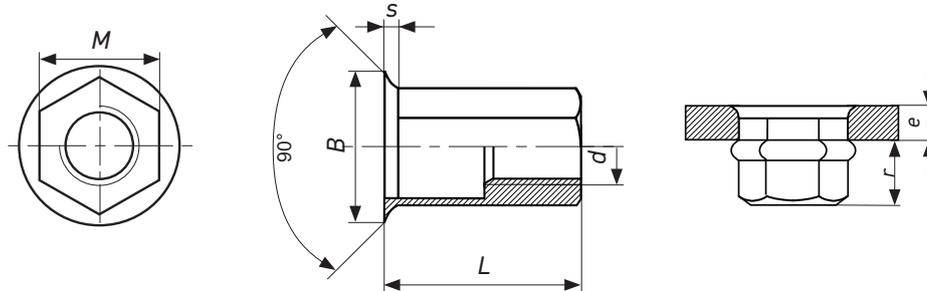

MATERIAL

STEEL CB 4 FF


TOLLERANCES

According to ISO 4159-1 CAT A

AVAILABLE TREATMENT

White zinc plated according to RoHs - Other coatings on request

d		L*	B	M ₁	M	e	s	r*	Torque Nm
M4	C	11	7,0	6	5,9	0,5 - 2,5	0,8	6,5	5
	L	13,5	7,6	6	5,9	2 - 4	0,8	6,5	5
M5	C	14	8,0	7	6,9	0,5 - 3	1,0	8,0	9
	L	15,5	8,9	7	6,9	2 - 5	1,0	8,0	9
M6	C	16	10,0	9	8,9	0,5 - 3	1,2	10,0	14
	L	18	10,9	9	8,9	3 - 6	1,5	10,0	14
M8	C	18	12,0	11	10,9	1 - 4	1,5	11,5	25
	L	20	12,5	11	10,9	3 - 6	1,5	10,5	25
M10	C	19	14,5	12	11,9	0,5 - 3,5	1,8	12,5	45
	L	22,5	14,5	12	11,9	3 - 6	1,8	12,0	45
M10	C	19	15,5	13	12,9	0,5 - 3,5	1,8	12,5	45
	L	22,5	15,5	13	12,9	3 - 6	1,8	12,0	45



.(*) Sizes L and r allow wide tolerances for the reference values are e and M₁.