


STEEL REDUCED HEAD RIVET NUTS WITH PARTIALLY HEXAGONAL SHANK ERSE

ISO METRIC COARSE THREAD

ISO UNI DIN

- - -

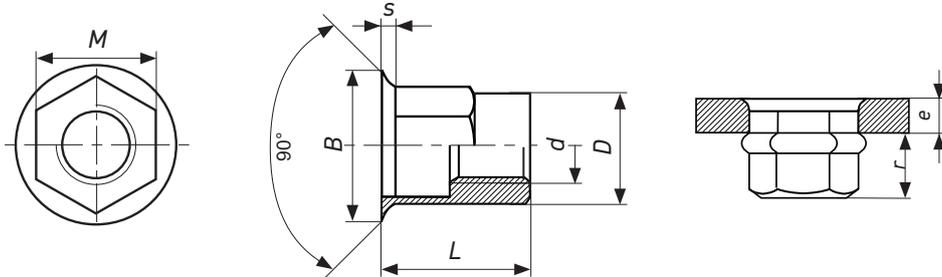

MATERIAL

STEEL CB 4 FF


TOLLERANCES

According to ISO 4159-1 CAT A

AVAILABLE TREATMENT

White zinc plated according to RoHs - Other coatings on request

d	L*	B	M ₁	M	e	s	r*	Torque Nm
M4	10	9,0	6	5,9	0,5 - 2	0,8	6,5	3
M5	12	10,0	7	6,9	0,5 - 2,5	1,0	8	6
M6	14,5	13,0	9	8,9	0,5 - 3	1,2	9,5	12
M8	16,5	15,0	11	10,9	1 - 3,5	1,5	10	26
M10	23	17,0	13	12,9	0,5 - 3,5	1,8	12,5	40

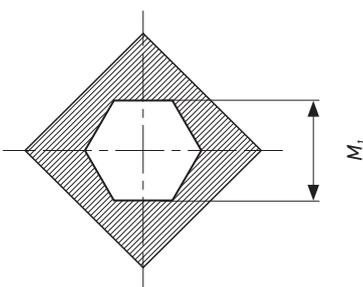

.(*) Sizes L and r allow wide tolerances for the reference values are e and M₁