


ROOFING SCREWS

ISO METRIC COARSE THREAD

NFE
27-128

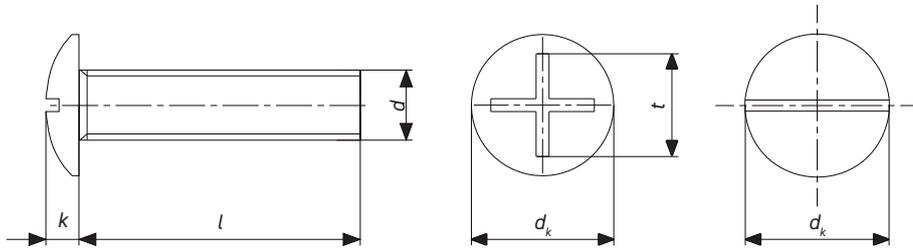

MATERIAL	STEEL	STAINLESS STEEL*
MECHANICAL PROPERTIES	ACCORDING TO ISO 898-1	ACCORDING TO ISO 3506-1
CLASS	4.8	A2
TOLLERANCES	ACCORDING TO ISO 4759-1 CAT C	ACCORDING TO ISO 4759-1 CAT A
AVAILABLE TREATMENT	Plain - White zinc plated or Yellow zinc plated according to RoHS - Other coatings on request	

d	M4	M5	M6	M8
d_k	9,5-9,8	11,8-12,0	13,8-14,0	18,3-18,7
k_{max}	2,20	2,70	3,3	4,4
t	7,00	9,00	10,00	14,00

l					Kg
8	1,53				
10	1,68			4,00	
12	1,83			5,13	
16	2,13	3,65		5,82	12,26
20	2,43	4,13		6,51	13,50
25	2,80	4,73		7,37	15,07
30	3,18	5,33		8,24	16,63
35	3,55	5,93		9,10	18,20
40	3,93	6,53		9,97	19,76
45	4,30	7,13		10,83	21,33
50	4,68	7,73		11,70	22,88
60				13,42	26,00
70				15,14	29,12
80				16,80	32,25

Weight for 1000 pcs

*The stainless steel version has only one notch.
For stainless steel A2 products, multiply the weight values for 1,01.
The weights indicated are approximate. **Other sizes available on request.**

