


HEX NUTS

ISO METRIC COARSE AND FINE

ISO UNI DIN
- 5588 934

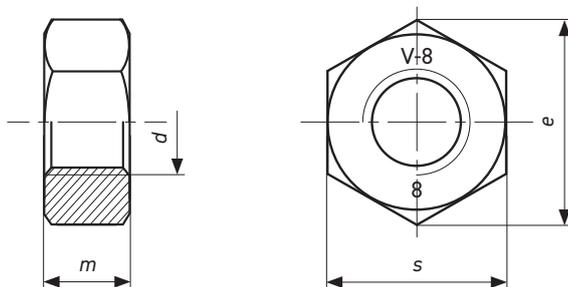

MATERIAL	STEEL			STAINLESS STEEL		BRASS
MECHANICAL PROPERTIES	ACCORDING TO DIN 267-4 UNI 3740-4			ACCORDING TO ISO 3506-2		ACCORDING TO ISO 3506-1
CLASS	8/6S	10/8G	12	A2	A4	OT
TOLLERANCES	ACCORDING TO ISO 4759-1 CAT A-B			ACCORDING TO ISO 4759-1 CAT A-B		ACCORDING TO ISO 4759-1 CAT A
AVAILABLE TREATMENT	Plain - White zinc plated or Yellow zinc plated according to RoHS - Other coatings on request					
<i>d</i>	<i>s</i>	<i>m</i>	<i>e</i> min	coarse thread	fine thread	Kg
M 2	4	1,2	4,38	0,4		0,14
M 2,5	5	2	5,45	0,45		0,28
M 3	5,5	2,4	6,01	0,5		0,38
M 4	7	3,2	7,66	0,7		0,81
M 5	8	4	8,79	0,8		1,23
M 6	10	5	11,05	1		2,50
M 7	11	5,5	12,12	1		3,12
M 8	13	6,5	14,38	1,25	1	5,2
M 10	17	8	18,90	1,5	1,25/1,5	11,6
M 12	19	10	21,10	1,75	1,5	17,3
M 14	22	11	24,49	2	1,5	25,0
M 16	24	13	26,75	2	1,5	33,3
M 18	27	15	29,56	2,5	1,5	49,4
M 20	30	16	32,95	2,5	1,5	64,4
M 22	32	18	35,03	2,5	1,5	79
M 24	36	19	39,55	3	2	110
M 27	41	22	45,20	3	2	165
M 30	46	24	50,85	3,5	2	223
M 33	50	26	55,37	3,5	2	288
M 36	55	29	60,79	4	3	393
M 39	60	31	66,44	4	3	502
M 42	65	34	72,09	4,5	3	652
M 45	70	36	76,95	4,5	3	800
M 48	75	38	82,60	5	3	977
M 52	80	42	88,25	5	3	1220
M 56	85	45	93,56	5,5	4	1420
M 60	90	48	99,21	5,5	4	1690
M 64	95	51	104,86	6		1980
M 68	100	54	110,51	6		2300
M 72	105	58	116,16	6		2670
M 76	110	61	121,81	6		3040
M 80	115	64	127,46	6		3440

Weight for 1000 pcs

*Tolerances are grade A until diameter 16, grade B over M16

For stainless steel A2 products, multiply the weight values for 1,01, A4 by 1,013. For the weights of the brass products multiply the values by 1,083.

The weights indicated are approximate. **Other sizes available on request.**

