


NYLON INSERT THIN HEX LOCK NUTS

ISO METRIC COARSE AND FINE THREAD

ISO UNI DIN
10511* 7474 985

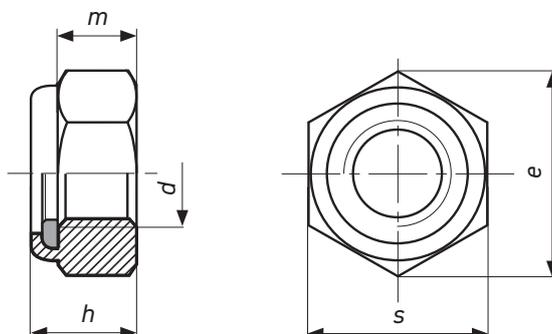

MATERIAL	STEEL	STAINLESS STEEL
MECHANICAL PROPERTIES	ACCORDING TO DIN 267-4 UNI 3740-4	ACCORDING TO ISO 3506-2
CLASS	04** 05	A2 A4
TOLLERANCES	ACCORDING TO ISO 4759-1 CAT A - B	ACCORDING TO ISO 4759-1 CAT A-B
AVAILABLE TREATMENT	White zinc plated or Yellow zinc plated according to RoHS Other coatings on request	

d	s	e min	h (***)	m	coarse thread	Kg	fine thread	Kg
M 3	5,5		4		0,5	0,5		
M 4	7	7,74	5	3,2	0,7	1,0		
M 5	8	8,87	5	3,5	0,8	1,4		
M 6	10	11,05	6	4,5	1	2,4		
M 7	11	12,12	7,5	5,6	1	3,0		
M 8	13	14,38	8	6,5	1,25	5,1	1	5,0
M 10	17	18,9	10	8	1,5	10,6	1,25	10,4
M 12	19	21,1	12	10	1,75	17,2	1,25	16,9
M 14	22	24,49	14	11	2	26	1,5	25,5
M 16	24	26,75	16 (15)	12,8	2	34	1,5	33,3
M 18	27	30,14	18,5 (16)	14,4	2,5	45	1,5	44,1
M 20	30	33,53	20 (17,5)	16	2,5	65	1,5	63,7
M 22	32	35,72	22 (19)	17,6	2,5	75	1,5	73,5
M 24	36	39,98	24 (21)	19	3	100	2	98,0
M 27	41	45,63	27 (22,5)	21,6	3	162	2	159
M 30	46	51,28	30 (24,5)	24	3,5	212	2	208
M 33	50	55,8	33 (26)	24	3,5	317	2	311
M 36	55	61,31	36 (30)	28	4	415	3	407
M 39	60	66,96	39 (32)	31	4	499	3	489
M 42	65	72,61	42	33	4,5	628	3	615
M 45	70	78,26	45	36	4,5	771	3	756
M 48	75	83,91	48	38	5	998	3	978

Weight for 1000 pcs

(*) ISO 10511 includes coarse thread nuts.

(**) Low height of nuts does not allow the performance of UNI 3740-4 and DIN 267-4 as indicated for 8 class nuts also if steel quality is the same. For stainless steel A2 products, multiply the weight values for 1,01, A4 by 1,013.

(***) Sizes h between brackets are according to the norm UNI 7474.

The weights indicated are approximate. **Other sizes available on request.**

