


ISO HEX NUTS

ISO METRIC COARSE THREAD

ISO 4032 UNI - DIN -

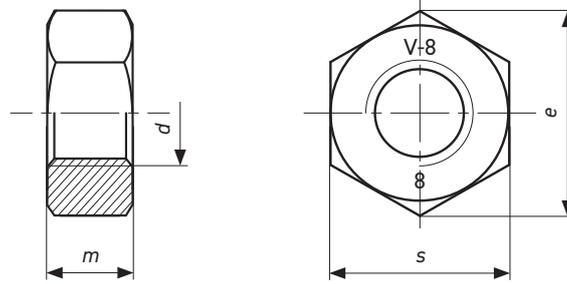

MATERIAL	STEEL	STAINLESS STEEL
MECHANICAL PROPERTIES	ACCORDING TO ISO 20898-2	ACCORDING TO ISO 3506-2
CLASS	8 12	A2 A4
TOLLERANCES	ACCORDING TO ISO 4759-1 CAT A - B*	ACCORDING TO ISO 4759-1 CAT A-B
AVAILABLE TREATMENT	Plain - White zinc plated or Yellow zinc plated according to RoHS - Other coatings on request	

<i>d</i>	<i>s</i>	<i>m</i>	<i>e</i> min	thread	 Kg
M 4	7	2,9 - 3,2	7,66	0,7	0,81
M 5	8	4,4 - 4,7	8,79	0,8	1,23
M 6	10	4,9 - 5,2	11,05	1	2,50
M 8	13	6,4 - 6,8	14,38	1,25	5,2
M 10	16	8,04 - 8,4	17,77	1,5	11,6
M 12	18	10,37 - 10,8	20,03	1,75	17,3
M 14	21	12,1 - 12,8	23,36	2	25
M 16	24	14,1 - 14,8	26,75	2	33,3
M 18	27	15,1 - 15,8	29,56	2,5	49,4
M 20	30	16,9 - 18	32,95	2,5	64,4
M 22	34	18,1 - 19,4	37,29	2,5	79
M 24	36	20,2 - 21,5	39,55	3	110
M 27	41	22,5 - 23,8	45,20	3	165
M 30	46	24,3 - 25,6	50,85	3,5	233

 Weight for 1000 pcs

(* Tolerances are grade A until diameter M16 grade B over M16.
The weights indicated are approximate. **Other sizes available on request.**