


# LIFTING EYE BOLTS

ISO METRIC COARSE THREAD AND FINE THREAD

ISO UNI DIN  
- 2947 580

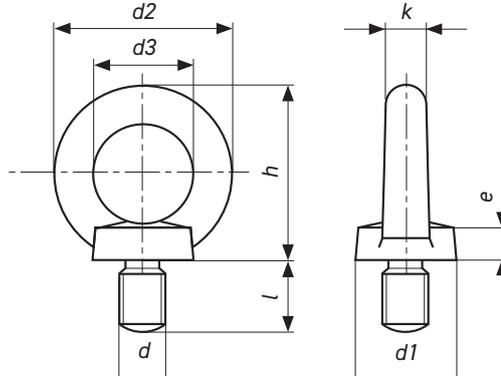

MATERIAL

HARDENED STEEL

STAINLESS STEEL

TOLLERANCES

ACCORDING TO DIN 7526

CLASS

**C15**

**A2**

**A4**

AVAILABLE TREATMENT

Plain - White zinc plated or Yellow zinc plated according to RoHS - Other coatings on request

d	d3	d2	d1	e	l	passo thread	k	carico max max load Kg		Kg
										
M 6	36	20	20	6	13	1	8	90	60	
M 8	36	20	20	6	13	1,25	8	140	95	60
M 10	45	25	25	6	17	1,5	10	230	170	110
M 12	54	30	30	10	20,5	1,75	12	340	240	180
M 14	54	30	30	10	20,5	2	12	500	350	
M 16	63	35	35	12	27	2	14	700	500	280
M 18	63	35	35	12	27	2,5	14	930	651	
M 20	72	40	40	14	30	2,5	16	1200	830	450
M 22	72	40	40	14	30	2,5	16	1500	1050	
M 24	90	50	50	18	36	3	20	1800	1270	740
M 27	98	54	62	20	40	3	22	2500	1750	
M 30	108	60	65	22	45	3,5	24	3600	2600	1660
M 33	108	60	65	22	45	3,5	24	4200	2940	
M 36	126	70	75	26	54	4	28	5100	3700	2650
M 36	126	70	75	26	54	3	28	5100	3700	2650
M 42	144	80	85	30	63	4,5	32	7000	5000	4030
M 42	144	80	85	30	63	3	32	7000	5000	4030
M 48	166	90	100	35	68	5	38	8600	6100	6380
M 48	166	90	100	35	68	3	38	8600	6100	6380

 Weight for 1000 pcs

For stainless steel A2 products, multiply the weight values for 1,01, A4 by 1,013.  
The weights indicated are approximate. **Other sizes available on request.**

