


# INTERNAL DRIVE PIPE PLUG WITH CONICAL COLLAR CYLINDRICAL HEX SOCKET

ISO    UNI    DIN  
-       -       908

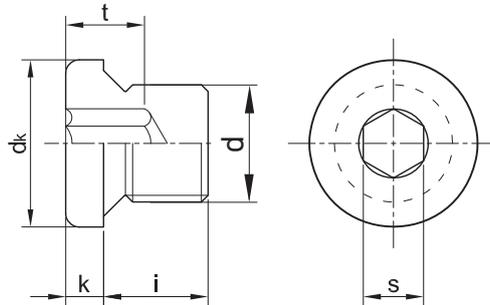

MATERIAL	STEEL	STAINLESS STEEL
MECHANICAL PROPERTIES	According to UNI EN 10277, 10263-3	According to UNI EN ISO 3506-1
CLASS	<b>5.8</b>	<b>A2</b> <b>A4</b>
TOLLERANCESS	According to UNI 4759-1	According to UNI 4759-1
AVAILABLE TREATMENT	Plain, phosphated, White zinc plated according to RoHS - Other coatings on request	

d	s	t	d <sub>k</sub>	k	i	 Kg
M 8x1	3	2,4	12	3	8	-
M 10x1	5	5	14	3	8	6,3
M 12x1,5	6	7	17	3	12	11,3
M 14x1,5	6	7	19	3	12	16
M 16x1,5	8	7,5	21	3	12	19
M 18x1,5	8	7,5	23	4	12	28,3
M 20x1,5	10	7,5	25	4	14	37,5
M 22x1,5	10	7,5	27	4	14	47,5
M 24x1,5	12	7,5	29	4	14	53,5
M 26x1,5	12	9	31	4	16	68,7
M 27x2	12	9	32	4	16	73,5
M 30x1,5	17	9	36	4	16	84
M 30x2	17	9	36	4	16	84
M 33x1,5	17	9	39	5	16	111
M 36x1,5	9	10,5	42	5	16	134
M 36x2	19	10,5	42	5	16	134
M 38x1,5	19	10,5	42	5	16	149
M 42x1,5	22	10,5	49	5	16	187
M 45x1,5	22	10,5	52	5	16	215
M 48x1,5	24	10,5	55	5	16	246
M 52x1,5	24	10,5	60	5	16	302
M 52x2	32	10,5	64	5	16	302
M 56x2	32	14	72	5	20	386
M 64x2	32	14	72	5	20	530
1/8"	5	5	14	3	8	6,3
1/4"	7	7	18	3	12	14,6
3/8"	8	7,5	22	3	12	21,4
1/2"	10	7,5	26	4	14	40,8
3/4"	12	9	32	4	16	73,5
1"	17	9	39	5	16	111
1" 1/8	19	10,5	44	5	16	149
1" 1/4	22	10,5	49	5	16	187
1" 1/2	24	10,5	55	5	16	246
1" 3/4	3	14	62	5	20	320
2"	32	14	68	5	20	445

 Weight for 1000 pcs

For stainless steel A2 products, multiply the weight values for 1,01, A4 by 1,013.  
The weights indicated are approximate. **Other sizes available on request.**

THE DATA CONTAINED ARE NOT BINDING. THE COMPANY RESERVES THE RIGHT TO CHANGE THE INFORMATION CONTAINED HEREIN WITHOUT PRIOR NOTICE. Copyright VIPA s.p.a.

