


HEX HEAD SCREW PLUG WITH COLLAR CYLINDRICAL THREAD

ISO UNI DIN
- - 910

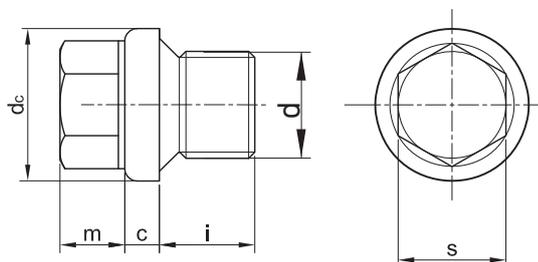

MATERIAL

STEEL

STAINLESS STEEL

MECHANICAL PROPERTIES

According to UNI EN 10277, 10263-3

According to UNI EN ISO 3506-1

CLASS

5.8

A2

A4

TOLLERANCESS

According to UNI 4759-1

According to UNI 4759-1

AVAILABLE TREATMENT

Plain, phosphated, White zinc plated according to RoHS -
Other coatings on request

d	c	d _c	m	s	i	 Kg
M 10x1	3	14	6	10	8	8,6
M 12x1,5	3	17	6	13	12	14,6
M 14x1,5	3	19	6	13	12	18
M 16x1,5	3	21	6	17	12	25,3
M 18x1,5	4	23	6	17	12	34,9
M 20x1,5	4	25	8	19	14	46,4
M 22x1,5	4	27	8	19	14	52,8
M 24x1,5	4	29	9	22	14	67,3
M 26x1,5	4	31	10	24	16	86,4
M 27x2	4	32	10	24	16	91,4
M 30x1,5	4	36	10	24	16	106,5
M 30x2	4	36	10	24	16	106,4
M 33x1,5	5	39	11	27	16	140,4
M 36x1,5	5	42	11	27	16	158,4
M 36x2	5	42	11	27	16	158,4
M 38x1,5	4	44	11	27	16	171,3
M 42x1,5	5	49	12	30	16	-
M 42x2	5	49	12	30	16	-
M 45x1,5	5	49	12	30	16	-
M 45x2	5	55	12	30	16	-
M 48x1,5	5	52	12	30	16	-
M 48x2	5	55	12	30	16	-
M 52x1,5	5	60	12	30	16	-
M 56x2	5	64	15	15	36	-
M 64x2	5	72	15	15	36	-
1/8" GAS	3	14	6	10	8	8,6
1/4" GAS	3	18	6	13	12	17,1
3/8" GAS	3	22	6	17	12	27,4
1/2" GAS	4	26	8	19	14	47,9
3/4" GAS	4	32	10	24	16	91,4
1" GAS	5	39	11	27	16	140,4

 Weight for 1000 pcs

For stainless steel A2 products, multiply the weight values for 1,01, A4 by 1,013.
The weights indicated are approximate. **Other sizes available on request.**