


# FULL METAL FLANGED HEX LOCK NUTS

ISO METRIC COARSE THREAD

ISO 7044    UNI -    DIN 6927

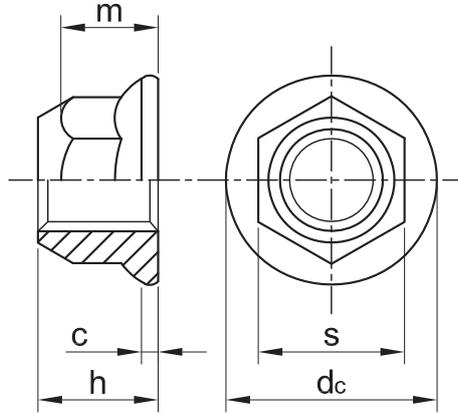

MATERIAL	STEEL	STAINLESS STEEL
MECHANICAL PROPERTIES	ACCORDING TO DIN 267-4 UNI 3740-4 ISO 2320	ACCORDING TO ISO 3506-1
CLASS	<b>8</b> <b>10</b>	<b>A2</b>
TOLLERANCES	ACCORDING TO ISO 4759-1 CAT A - B	ACCORDING TO ISO 4759-1 CAT A-B
AVAILABLE TREATMENT	White zinc plated or Yellow zinc plated according to RoHS Other coatings on request	

<i>d</i>	<i>s</i>	<i>dc max</i>	<i>h max</i>	<i>m</i>	<i>c min</i>	coarse thread	fine thread
M 5	8	11,8	7,1	4,7	1	0,8	
M 6	10	14,2	9,1	5,7	1,1	1	
M 8	13	17,9	11,1	7,6	1,2	1,25	1
M 10	15	21,8	13,5	9,6	1,5	1,5	1/1,25
M 12	18	26	16,1	11,6	1,8	1,75	1,25/1,5
M 14	21	29,9	18,2	13,3	2,1	2	1,5
M 16	24	34,5	20,3	15,3	2,4	2	1,5
M 20	30	42,8	24,8	18,9	3	2,5	1,5

For stainless steel A2 products, multiply the weight values for 1,01  
The weights indicated are approximate. **Other sizes available on request.**