


# STANDARD CASTLE HEX NUTS

ISO METRIC COARSE AND FINE THREAD

ISO 7035    UNI 5593    DIN 935

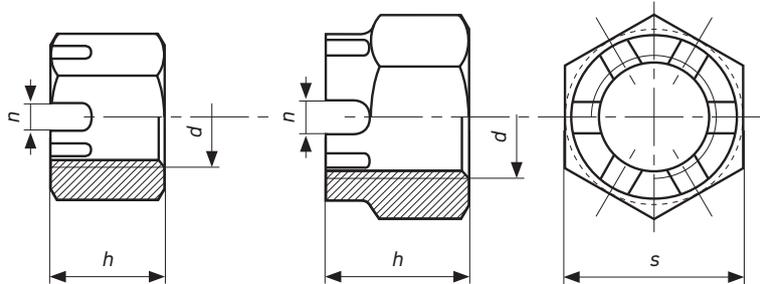

MATERIAL	STEEL		STAINLESS STEEL					
MECHANICAL PROPERTIES	ACCORDING TO DIN 267-4 UNI 3740-4			ACCORDING TO ISO 3506-1				
CLASS	6/5S			A2		A4		
TOLLERANCES	ACCORDING TO ISO 4759-1 CAT A - B*				ACCORDING TO ISO 4759-1 CAT A-B*			
AVAILABLE TREATMENT	Plain - White zinc plated or Yellow zinc plated according to RoHS - Other coatings on request							
<i>d</i>	<i>h</i>	<i>s</i>	<i>n</i>	coarse thread	Kg	fine thread	Kg	
M 8	9,5	13	2	1,25	7,35	1	7,2	
M 10	12	17	2,5	1,5	15,8	1,25	15,5	
M 10	12	17	2,5		15,8	1	15,5	
M 12	15	19	3,2	1,75	22,6	1,25	22,2	
M 12	15	19	3,2		22,6	1,5	22,2	
M 14	16	22	3,2	2	27,0	1,5	26,6	
M 16	19	24	4	2	38,9	1,5	37,9	
M 18	21	27	4	2,5	57,5	1,5	54,6	
M 20	22	30	4	2,5	75,2	1,5	71,9	
M 22	26	32	5	2,5	93	1,5	88,7	
M 24	27	36	5	3	131	2	126	
M 27	30	41	5	3	192	2	187	
M 30	33	46	7	3,5	264	2	254	
M 33	35	50	7	3,5	333	2	320	
M 36	38	55	7	4	447	3	438	
M 39	40	60	7	4	584	3	573	
M 42	46	65	9	4,5	710	3	690	
M 45	48	70	9	4,5	860	3	835	
M 48	50	75	9	5	1060	3	1030	
M 52	54	80	9	5	1300	3	1260	
M 56	57	85	9	5,5	1500	4	1480	

Weight for 1000 pcs

(\* Tolerances are grade A until diameter M16 grade B over M16.  
The weights indicated are approximate. **Other sizes available on request.**