


# HEXAGON FULL METAL LOCK NUTS CONELOCK

ISO 7042 METRIC COARSE THREAD - ISO 10513 METRIC FINE THREAD

ISO 7042-10513    UNI -    DIN 980V

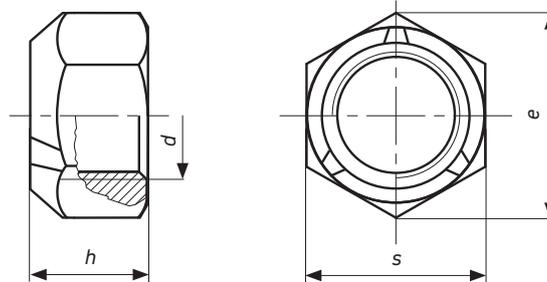

MATERIAL	STEEL	STAINLESS STEEL
MECHANICAL PROPERTIES	ACCORDING TO DIN 267-4 UNI 3740-4 ISO 2320	ACCORDING TO ISO 3506-1
CLASS	<b>8</b> <b>10</b>	<b>A2</b> <b>A4</b>
TOLLERANCES	ACCORDING TO ISO 4759-1 CAT A - B	ACCORDING TO ISO 4759-1 CAT A-B
AVAILABLE TREATMENT	White zinc plated or Yellow zinc plated according to RoHS Other coatings on request	

<i>d</i>	<i>s</i>	<i>h</i> max	<i>e</i>	coarse thread	fine thread	 Kg
M 5	8	5,1	8,79	0,8		1,49
M 6	10	6	11,05	1		2,90
M 8	13	8	14,38	1,25		6,37
M 10	17/16	10	18,90	1,5	1,25	14,00
M 12	19/18	12	21,10	1,75	1,5	19,89
M 14	22/21	14	24,49	2	1,5	30,87
M 16	24	16	26,75	2	1,5	39,70
M 18	27	18	29,56	2	1,5	57,00
M 20	30	20	32,95	2	1,5	77,50

 Weight for 1000 pcs

Anti Rust surface treatments have to be agreed between customer and supplier.  
For stainless steel A2 products, multiply the weight values for 1,01, A4 by 1,013.  
The weights indicated are approximate. **Other sizes available on request.**

