


HEXAGON DOMED CUP LOCK NUTS

ISO METRIC COARSE THREAD

ISO UNI DIN
- - 986

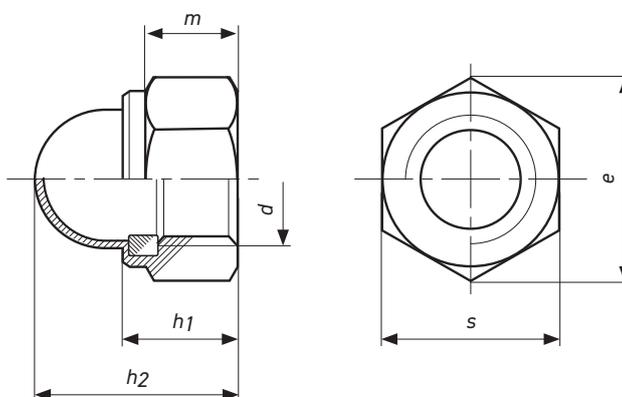

| MATERIAL | STEEL | STAINLESS STEEL |
|-----------------------|--|-------------------------------|
| MECHANICAL PROPERTIES | ACCORDING TO DIN 267-4 UNI 3740-4 ISO 2320 | ACCORDING TO ISO 3506-2 |
| CLASS | 8 | A2 A4 |
| TOLLERANCES | ACCORDING TO ISO 4759-1 CAT A | ACCORDING TO ISO 4759-1 CAT A |
| AVAILABLE TREATMENT | White zinc plated or Yellow zinc plated according to RoHS - Other coatings on request | |

| | s | e | h ₁ | h ₂ | m | thread |  Kg |
|-------------|----|-------|----------------|----------------|------|--------|--|
| M 4 | 7 | 7,74 | 5,6 | 9,6 | 3,2 | 0,7 | 1,40 |
| M 5 | 8 | 8,87 | 6 | 10,5 | 4 | 0,8 | 1,55 |
| M 6 | 10 | 11,05 | 7,5 | 12 | 5 | 1 | 3,30 |
| M 8 | 13 | 14,38 | 8,9 | 14 | 6,4 | 1,25 | 5,30 |
| M 10 | 17 | 18,9 | 10,5 | 18,1 | 7,8 | 1,5 | 10,70 |
| M 12 | 19 | 21,1 | 13,5 | 22,5 | 9,6 | 1,75 | 19,00 |
| M 14 | 22 | 24,49 | 15,5 | 26,4 | 11,7 | 2 | 26,80 |
| M 16 | 24 | 26,75 | 16,5 | 27,5 | 12,5 | 2 | 37,10 |
| M 20 | 30 | 33,53 | 21 | 35 | 17 | 2,5 | 111,00 |

 Weight for 1000 pcs

The weights indicated are approximate. **Other sizes available on request.**

