


# THIN HEX NUTS

ISO METRIC COARSE AND FINE THREAD

ISO    UNI    DIN  
-    5589    936

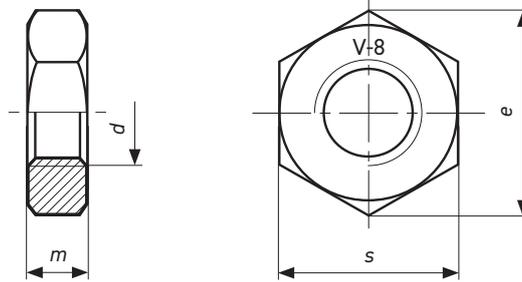

MATERIAL	STEEL	STAINLESS STEEL
MECHANICAL PROPERTIES	ACCORDING TO DIN 267-24 UNI 3740-4	ACCORDING TO ISO 3506-2
CLASS	<b>04*</b> <b>05</b>	<b>A2</b> <b>A4</b>
TOLLERANCES	ACCORDING TO ISO 4759-1 CAT A - B**	ACCORDING TO ISO 4759-1 CAT A - B**
AVAILABLE TREATMENT	Plain - White zinc plated or Yellow zinc plated according to RoHS - Other coatings on request	

d	s	m	e min	coarse thread	fine thread	Kg
M 8	13	5	14,38	1,25	1	4,1
M 10	17	6	18,90	1,5	1,25	8,5
M 12	19	7	21,10	1,75	1,5	11,9
M 14	22	8	24,49	2	1,5	17,8
M 16	24	8	26,75	2	1,5	19,6
M 18	27	9	29,56	2,5	2	28,3
M 20	30	9	32,95	2,5	2	35
M 22	32	10	35,03	2,5	2	42
M 24	36	10	39,55	3	2	56
M 27	41	12	45,20	3	2	87
M 30	46	12	50,85	3,5	3	110
M 33	50	14	55,37	3,5	3	150
M 36	55	16	60,79	4	3	187
M 39	60	16	66,44	4	3	254
M 42	65	16	72,09	4,5	4	300
M 45	70	18	77,74	4,5	4	390

Weight for 1000 pcs

(\* ) Low height of nuts does not allow the performance of UNI 3740-4 and DIN 267-4 as indicated for 8 class nuts also if steel quality is the same.

(\*\*)Tolerances are grade A until diameter 16, grade B over M16

For stainless steel A2 products, multiply the weight values for 1,01, A4 by 1,013.

The weights indicated are approximate. **Other sizes available on request.**

