


# THIN CASTLE HEX NUTS

ISO METRIC COARSE AND FINE THREAD

ISO UNI DIN  
- 5594 937\*

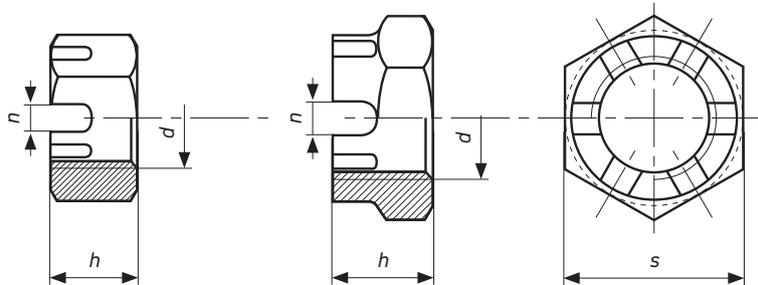

## MATERIAL

STEEL

STAINLESS STEEL

## MECHANICAL PROPERTIES

ACCORDING TO DIN 267-4 UNI 3740-4

ACCORDING TO ISO 3506-1

## CLASS

6/5S

A2

A4

## TOLLERANCES

ACCORDING TO ISO 4759-1 CAT A-B\*\*

ACCORDING TO ISO 4759-1 CAT A-B\*

## AVAILABLE TREATMENT

Plain - White zinc plated or Yellow zinc plated according to RoHS - Other coatings on request

d	h	h DIN	s	n	coarse thread	 Kg	fine thread	 Kg
M 8	8		13	2	1,25	6,13	1	6,03
M 10	10		17	2,5	1,5	12,89	1,25	12,72
M 10	10	9	17	2,5		12,89	1	12,72
M 12	12	10	19	3,2	1,75	17,5	1,25	17
M 12	12	10	19	3,2		17,5	1,5	17
M 14		14	22	3,2	2	20,3	1,5	19,06
M 16	14	12	24	4	2	26,2	1,5	25,5
M 18		13	27	4	2,5	37,2	1,5	35,7
M 20		13	30	4	2,5	47,5	1,5	45,4
M 22		13	32	5	2,5	59,5	1,5	56,6
M 24		15	36	5	3	79,9	2	76,9
M 27	20	15	41	5	3	118	2	114
M 30	21	17	46	7	3,5	150	2	145
M 33	23	18	50	7	3,5	201	2	193
M 36	23	20	55	7	4	246	3	239
M 39	25	20	60	7	4	335	3	329
M 42	28	22	65	9	4,5	370	3	357
M 45	30	23	70	9	4,5	447	3	433
M 48	30	25	75	9	5	552	3	535
M 52	32	27	80	9	5	678	3	655
M 56	37		85	9	5,5	780	4	770

 Weight for 1000 pcs

(\*) The norm DIN 937 is similar to UNI 5594, from which differs mainly for the lower height.

(\*\*) Tolerances are grade A until diameter M16 grade B over M16.

The weights indicated are approximate. **Other sizes available on request.**

