


# HEX DOMED CAP NUTS

ISO METRIC COARSE THREAD

ISO - UNI 5721 DIN 1587

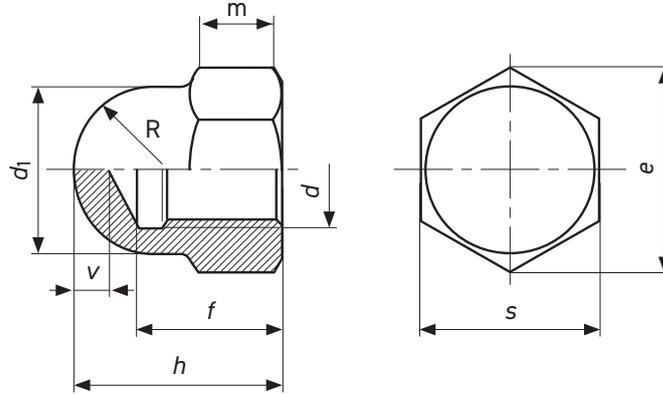

MATERIAL	STEEL	STAINLESS STEEL	BRASS
MECHANICAL PROPERTIES	ACCORDING TO DIN 267-4 UNI 3740-4	ACCORDING TO ISO 3506-2	ACCORDING TO DIN 267-4 UNI 3740-4
CLASS	<b>8</b>	<b>A2</b> <b>A4</b>	<b>OT</b>
TOLLERANCES	ACCORDING TO ISO 4759-1 CAT A-B*	ACCORDING TO ISO 4759-1 CAT A-B*	ACCORDING TO ISO 4759-1 CAT A-B*
AVAILABLE TREATMENT	Plain - White zinc plated or Yellow zinc plated according to RoHS - Other coatings on request		

$d$	$d_1$	$e$ min	$f$ Js15	$h$ h14	$m$ Js14	$R$	$s$ nominal	tolerances	$v$ min	Kg
M 3	5	6,08	4	5	2,4	2,50	5,5	h12	1	1,0
M 4	6,5	7,74	5	8	3,2	3,25	7		1	1,5
M 5	7,5	8,87	7	10	4	3,75	8		1	3,9
M 6	9,5	11,05	8	12	5	4,75	10	h13	2	4,6
M 8	12,5	14,38	11	15	6,5	6,25	13		2	11,0
M 10	16	18,90	13	18	8	8,00	17/16		2	20,1
M 12	18	21,10	16	22	10	9,00	19/18		3	28,3
M 14	21	24,49	18	25	11	10,50	22/21		3	40,2
M 16	23	26,75	21	28	13	11,50	24		3	54,3
M 18	26	30,14	25	32	15	13,00	27		3	95,0
M 20	28	33,53	26	34	16	14,50	30	3	104,0	
M 22	31	35,72	29	39	18	15,50	32/34	3	129,0	
M 24	34	39,98	31	42	19	17,00	36	h14	3	216,0

Weight for 1000 pcs

(\*) Tolerances are grade A until diameter 16, grade B over M16  
 For stainless steel A2 products, multiply the weight values for 1,01, A4 by 1,013.  
 For the weights of the brass products multiply the values by 1,083.  
 The weights indicated are approximate. **Other sizes available on request.**

