


SQUARE SECTION HELICAL SPRING WASHERS

ISO UNI DIN
- - 7980

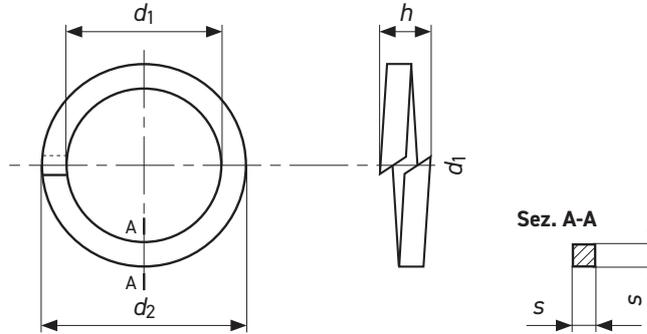

MATERIAL	SPRING STEEL	STAINLESS STEEL
MECHANICAL PROPERTIES	ACCORDING TO UNI EN 10270	ACCORDING TO UNI EN 10270
CLASS	430-530 HV	A2 A4
TOLLERANCES	ACCORDING TO DIN 7980	ACCORDING TO DIN 7980
AVAILABLE TREATMENT	Black - White zinc plated or Yellow zinc plated with dehydrogenation according to RoHS Other coatings on request	

d	d ₁ min	d ₂ max	h min	s	 Kg
M 3	3,1	5,6	2	1	0,105
M 4	4,1	7	2,4	1,2	0,195
M 5	5,1	8,8	3,2	1,6	0,37
M 6	6,1	9,9	3,2	1,6	0,425
M 8	8,1	12,7	4	2	1,05
M 10	10,2	16	5	2,5	1,96
M 12	12,2	18	5	2,5	2,28
M 14	14,2	21,1	6	3	3,80
M 16	16,2	24,4	7	3,5	5,94
M 18	18,2	26,4	7	3,5	6,6
M 20	20,2	30,6	9	4,5	12,3
M 22	22,5	32,9	9	4,5	13,6
M 24	24,5	35,9	10	5	18,1
M 27	27,5	38,9	10	5	20,6
M 30	30,5	44,1	12	6	32
M 33	33,5	47,1	12	6	35
M 36	36,5	52,2	14	7	52,5

 Weight for 1000 pcs

For stainless steel A2 products, multiply the weight values for 1,01, A4 by 1,013.
The weights indicated are approximate. **Other sizes available on request.**