


COUNTERSUNK BOLTS 90° WITH SQUARE NECK SCREWS

ISO METRIC COARSE THREAD

ISO UNI DIN
- - 608

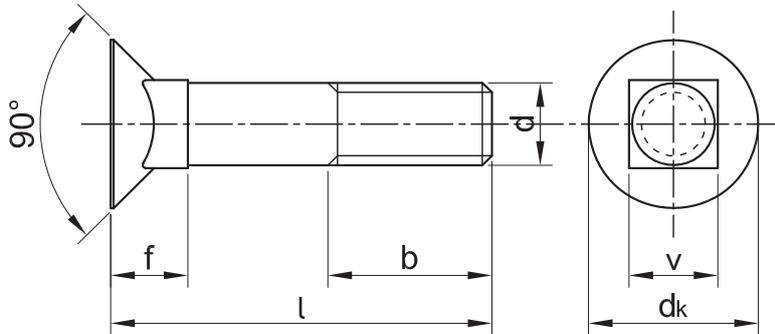

MATERIAL

STEEL

MECHANICAL PROPERTIES

ACCORDING TO ISO 898-1

CLASS

8.8

TOLLERANCES

ACCORDING TO ISO 4759-1 CAT C

AVAILABLE TREATMENT

Plain , White zinc plated according to RoHS. Other coatings on request

<i>d</i>	M10	M12	M14	M16
<i>b*</i>	26	30	34	16
<i>d_k</i>	20	24	28	32
<i>v</i>	10	12	14	16
<i>f</i>	10	12	14	16

<i>l</i>	M10	M12	M14	M16	Kg
25	30,2				
30	32,7	49,2			
35	35,2	52,8			
40	38,2	56,5	81,1	111	
45	41,2	60,6	86	117	
50	44,3	65	91,4	124	
60	50,5	73,9	103	140	

Weight for 1000 pcs

Sizes above the green line have full thread.
The weights indicated are approximate. **Other sizes available on request.**

THE DATA CONTAINED ARE NOT BINDING. THE COMPANY RESERVES THE RIGHT TO CHANGE THE INFORMATION CONTAINED HEREIN WITHOUT PRIOR NOTICE. Copyright VIPA s.p.a.

VIPA