


# CROSS RECESSED PAN HEAD TRILOBULAR SCREWS

ISO    UNI    DIN  
-      8112 7500 CE

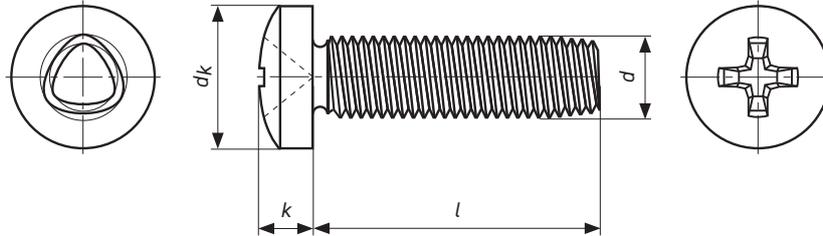

## MATERIAL

STEEL HARDENED

## MECHANICAL PROPERTIES

ACCORDING TO ISO 7323-6

## CLASS

**C15**

## TOLLERANCES

ACCORDING TO ISO 4759-1 CAT A

## AVAILABLE TREATMENT

White zinc plated or Yellow zinc plated according to RoHS - Other coatings on request

<i>d</i>	2,5	3	3,5	4	5	6
<i>p</i>	0,45	0,5	0,6	0,7	0,8	1
<i>d</i> min	2,39	2,88	3,36	3,84	4,82	5,77
<i>d</i> max	2,46	2,95	3,44	3,93	4,92	5,9
<i>d</i> <sub>k</sub> max	5	6	7	8	10	12
<i>k</i>	2	2,4	2,7	3,1	3,8	4,6
 N° Phillips	1	1	2	2	2	3

<i>l</i>							 Kg
	2,5	3	3,5	4	5	6	
5	0,400	0,666					
6	0,430	0,710		1,48			
8	0,490	0,798		1,63	2,91		
10	0,550	0,876		1,79	3,16	4,14	
12	0,610	0,954		1,94	3,41	4,49	
14	0,670	1,030		2,10	3,66	4,84	
15	0,700	1,070		2,33	3,79		
16	0,730	1,110		2,56	3,91	5,29	
20		1,270		2,94	4,41	6,00	
25		1,470		3,44	5,03	6,87	
30		1,710		3,94	5,70	7,75	
35				4,44	6,50	8,60	
40					7,30	9,50	
45					8,00	10,40	
50					8,70	11,30	

 Weight for 1000 pcs

Hexalobular (Allen) key available

The weights indicated are approximate. **Other sizes available on request.**