


# FLANGED HEX HEAD TRILOBULAR SCREWS

ISO    UNI    DIN  
-       8111    -

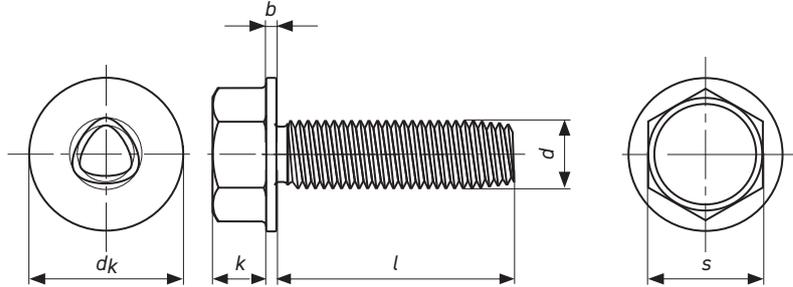

## MATERIAL

STEEL HARDENED

## MECHANICAL PROPERTIES

ACCORDING TO ISO 7323-6

## CLASS

**C15**

## TOLLERANCES

ACCORDING TO ISO 4759-1 CAT A

## AVAILABLE TREATMENT

White zinc plated according to RoHS - Other coatings on request

	3	3,5	4	5	6	8
<i>p</i>	0,5	0,6	0,7	0,8	1	1,25
<i>d</i> min	2,88	3,36	3,84	4,82	5,77	7,72
<i>d</i> max	2,95	3,44	3,93	4,92	5,9	7,88
<i>s</i>	5	5,55	7	8	10	13
<i>k</i> min	1,62	2,42	2,42	3,12	4,95	5,95
<i>b</i> min	0,3	0,4	0,5	0,5	0,8	0,9
<i>d</i> <sub>k</sub>	5,8÷6,2	6,8÷7,5	8,5÷9,2	9,8÷10,5	12,2÷13,2	15,9÷17,2

<i>l</i>	Kg					
	3	3,5	4	5	6	8
6	0,627	0,927				
8	0,710	1,038	1,566	2,387		
10	0,794	1,149	1,713	2,621	5,06	9,54
12		1,260	1,860	2,856	5,40	10,15
14		1,372	2,007	3,091	5,73	10,75
15		1,428	2,081	3,209	5,90	
16		1,483	2,154	3,326	6,07	11,36
20			2,448	3,796	6,75	12,57
25			2,816	4,383	7,59	14,08
30			3,184	4,970	8,44	15,59
35			3,551	5,557	9,28	17,11
40				6,15	10,13	18,62

Weight for 1000 pcs

The weights indicated are approximate. **Other sizes available on request.**

