


LIFTING EYE NUTS

ISO METRIC COARSE THREAD AND FINE THREAD

ISO UNI DIN
- 2948 582

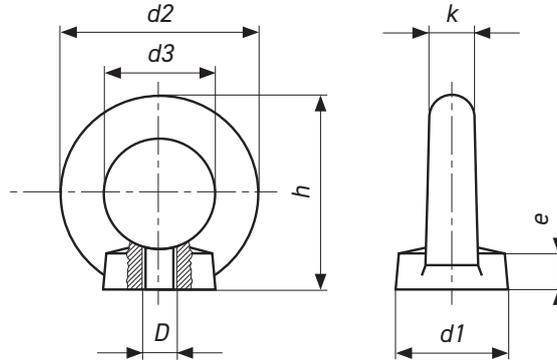

MATERIAL

HARDENED STEEL

STAINLESS STEEL

TOLLERANCES

ACCORDING TO DIN 7526

CLASS

C15

A2

A4

AVAILABLE TREATMENT

Plain - White zinc plated or Yellow zinc plated according to RoHS - Other coatings on request

| D | d1 | d2 | d3 | e | h | k | carico max max load | | Kg |
|------|-----|-----|-----|-----|-----|----|---|---|------|
| | | | | | | |  |  | |
| M 6 | 20 | 36 | 20 | 8,5 | 36 | 8 | 90 | 60 | |
| M 8 | 20 | 36 | 20 | 8,5 | 36 | 8 | 140 | 95 | 50 |
| M 10 | 25 | 45 | 25 | 10 | 45 | 10 | 230 | 170 | 90 |
| M 12 | 30 | 54 | 30 | 11 | 53 | 12 | 340 | 240 | 160 |
| M 14 | 30 | 54 | 30 | 11 | 53 | 12 | 500 | 350 | |
| M 16 | 35 | 63 | 35 | 13 | 62 | 14 | 700 | 500 | 240 |
| M 18 | 35 | 63 | 35 | 13 | 62 | 16 | 830 | 651 | |
| M 20 | 40 | 72 | 40 | 16 | 71 | 16 | 1200 | 830 | 360 |
| M 22 | 40 | 72 | 40 | 16 | 71 | 16 | 1500 | 1050 | |
| M 24 | 40 | 72 | 40 | 20 | 90 | 20 | 1800 | 1270 | 720 |
| M 27 | 40 | 72 | 40 | 20 | 90 | 20 | 2500 | 1750 | |
| M 30 | 65 | 108 | 60 | 25 | 109 | 24 | 3600 | 2600 | 1320 |
| M 36 | 75 | 126 | 70 | 30 | 128 | 28 | 5100 | 3700 | 2080 |
| M 42 | 85 | 144 | 80 | 35 | 147 | 32 | 7000 | 5000 | 3110 |
| M 48 | 100 | 166 | 90 | 40 | 168 | 38 | 8600 | 6100 | 5020 |
| M 56 | 110 | 184 | 100 | 45 | 187 | 42 | 11500 | 8050 | 6690 |
| M 64 | 120 | 206 | 110 | 50 | 208 | 48 | 16000 | 11200 | 9300 |

 Weight for 1000 pcs

For stainless steel A2 products, multiply the weight values for 1,01, A4 by 1,013.
The weights indicated are approximate. **Other sizes available on request.**

