


CROSS RECESSED COUNTERSUNK FLAT HEAD TRILOBULAR

ISO UNI DIN
- 8113 7500 M

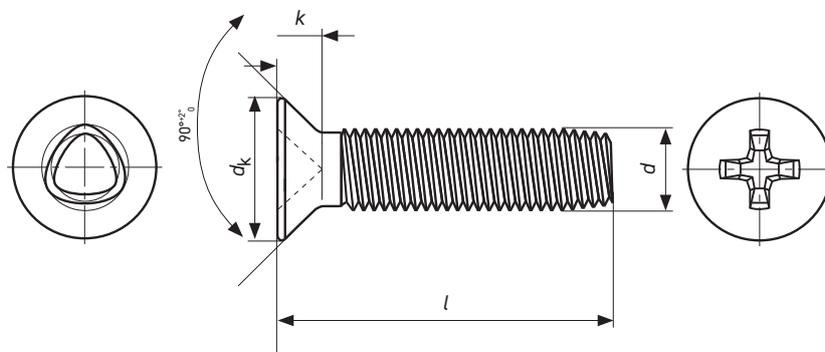

MATERIAL

STEEL HARDENED

MECHANICAL PROPERTIES

ACCORDING TO ISO 7323-6

CLASS

C15

TOLLERANCES

ACCORDING TO ISO 4759-1 CAT A

AVAILABLE TREATMENT

White zinc plated according to RoHS - Other coatings on request

<i>d</i>	2,5	3	3,5	4	5	6
<i>p</i>	0,45	0,5	0,6	0,7	0,8	1
<i>d</i> min	2,39	2,88	3,36	3,84	4,82	5,77
<i>d</i> max	2,46	2,95	3,44	3,93	4,92	5,9
<i>dk</i> max	4,7	5,6	6,5	7,5	9,2	11
<i>k</i>	1,5	1,65	1,93	2,2	2,5	3
 N° Phillips	1	1	2	2	2	3

<i>l</i>	 Kg					
6	0,266					
8	0,326	0,467		1,06	1,70	
10	0,386	0,555		1,22	1,95	
12	0,446	0,643		1,37	2,19	3,25
14	0,507	0,731		1,45	2,32	3,43
15	0,537	0,776		1,53	2,44	3,60
16	0,567	0,820		1,53	2,44	3,60
20				1,84	2,94	4,31
25				2,22	3,55	5,19
30				2,61	4,16	6,08
35				3,00	4,65	6,96
40				3,38	5,40	7,84

 Weight for 1000 pcs

Hexalobular (Allen) key available

The weights indicated are approximate. **Other sizes available on request.**

